

ViewSonic® LED DISPLAY **VG3448**


Key Features

- WQHD 1440p resolution
- Narrow bezel
- HDMI, DisplayPort and Mini DP inputs
- SuperClear® VA technology
- Client mount support



Product Description

The ViewSonic® VG3448 is not only designed for modern day office use, but also for entertainment at home. The VG3448's WQHD 3440 x 1440 resolution is 2.4 times higher than your standard Full HD, maximising efficiency and image detail with its increase in coverage area. The 34" screen with 21:9 aspect ratio and slim bezels bring wider viewing and make images and movies more immersive than ever. In addition to the versatile connectivity that includes DisplayPort, mini DP, two HDMI inputs as well as five USB 3.1 ports (1 up, 4 down), the VG3448 is designed with flexible ergonomic features: 40° tilt, swivel, and height adjustment. Enjoy a fun yet conscientious unboxing experience, as the packaging is environmentally friendly and set up time is minimal.

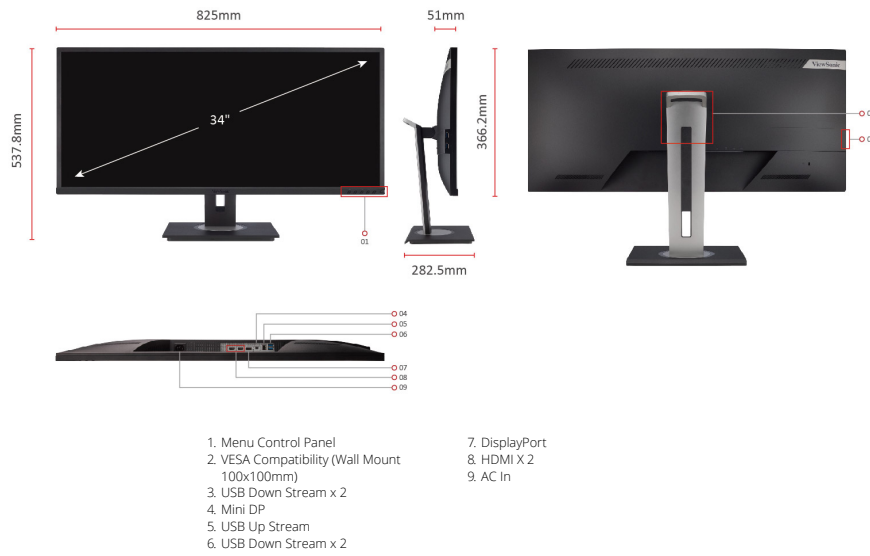

Visit Us  www.viewsonic.com

DISPLAY

Display Size (in.):	34
Viewable Area (in.):	34.1
Panel Type:	VA Technology
Resolution:	3440 x 1440
Resolution Type:	UltraWide QHD
Static Contrast Ratio:	3,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	300 cd/m2 (typ)
Colours:	1.073B
Colour Space Support:	10 bit (8 bit + FRC)
Aspect Ratio:	21:9
Response Time (Typical GTG):	5ms
Response Time (GTG w/OD):	5ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	40000 Hrs (Min)
Panel Surface:	Anti-Glare, Hard Coating (3H)
Curvature:	Flat
Refresh Rate (Hz):	60
Blue Light Filter:	Yes
Flicker-Free:	Yes
Colour Gamut:	Adobe RGB: 79% size / 74% coverage (Typ) NTSC: 72% size (Typ) sRGB: 106% size / 95% coverage (Typ)
Pixel Size:	0.233 mm (H) x 0.233 mm (V)

COMPATIBILITY

PC Resolution (max):	3440x1440
Mac® Resolution (max):	3440x1440
PC Operating System:	Windows 7/8/8.1/10 certified; macOS tested
Mac® Resolution (min):	3440x1440

CONNECTOR

USB 3.1 Type A:	4
USB 3.1 Type B:	1
HDMI 1.4:	2
Display Port:	1
Mini Display Port:	1
Power in:	3-pin Socket (IEC C14 / CEE22)

AUDIO

Internal Speakers:	3Watts x2
--------------------	-----------

POWER

Eco Mode (Conserve):	30W
Eco Mode (optimised):	32W
Consumption (typical):	35W
Consumption (max):	46W
Voltage:	AC 100-240V, 50/60 Hz
Stand-by:	0.3W
Power Supply:	Internal

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
Cable Organization:	Yes

CONTROLS

Physical Controls:	Key 1 (eye), Key 2, Key 3, Key 4, Key 5, Key 6 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Colour Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	15 ~ 150KHz
Frequency Vertical:	24 ~ 100Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.2), PCI-E - mini DisplayPort (v1.2)
---------------	---

ERGONOMICS

Height Adjust (mm):	130
Swivel:	120°
Tilt (Forward/Back):	-5° / 40°

WEIGHT (IMPERIAL)

Net (lbs):	19
Net Without Stand (lbs):	13.2
Gross (lbs):	29.5

WEIGHT (METRIC)

Net (kg):	8.6
Net Without Stand (kg):	6
Gross (kg):	13.4

DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	37.2 x 9.2 x 20.7
Physical (in.):	32.5 x 16.07~21.19 x 9.3
Physical Without Stand (in.):	32.5 x 14.4 x 2

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	945 x 234 x 525
Physical (mm):	825 x 408 x 236
Physical Without Stand (mm):	825 x 366 x 51

GENERAL

Regulations:	cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, RCM, CCC, China RoHS, China Energy Label
PACKAGE CONTENTS:	VG3448 x1, 3-pin Plug (IEC C13 / CEE22) x1, mini DisplayPort to DisplayPort Cable (v1.2; Male-Male) x1, HDMI Cable (v1.4; Male-Male) x1, USB A/B Cable (v3.1; Male-Male) x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market
Country Of Origin:	China
Power Management:	Energy Star standards, EPEAT