


## Key **Features**

- 1ms MPRT response time
- 144Hz refresh rate
- AMD FreeSync™ technology
- 88% NTSC & 120% sRGB wide colour gamut
  size
- Low input lag



## Product **Description**

The ViewSonic VX2758-PC-mh provides the perfect balance of eye comfort and immersion thanks to its 1800R curvature and 88% NTSC, 120% sRGB colour size. A 1ms MPRT response time and minimal input lag produce unprecedented speed that reinforces your reaction time in game, while a 144Hz refresh rate combined with AMD FreeSync™ technology deliver a smooth gaming experience free of screen tearing and stuttering. The VX2758-PC-mh also comes equipped with ViewSonic's exclusive ViewMode™ presets, which offer optimised screen performance for different home entertainment applications, such as watching movies, editing files, or playing video games. Two HDMI ports and a VGA input offer flexible connectivity for both general use and entertainment.

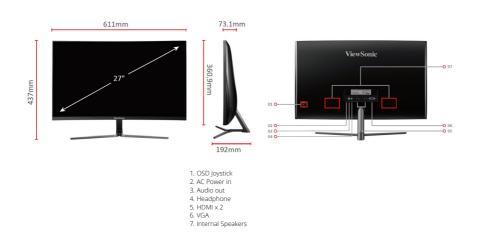

Visit Us www.viewsonic.com

| DISPLAY                    |  | ERGONOMICS                   |  |
|----------------------------|--|------------------------------|--|
| Display Size (in.):        | 27   | Tilt (Forward/Back):         | -5° / 20°  |
| Viewable Area (in.):       | 27   | WEIGHT (METRIC)              |  |
| Panel Type:                | VA Technology  | Net (kg):                    | 4.3  |
| Resolution:                | 1920 x 1080  | Net Without Stand (kg):      | 4  |
| Resolution Type:           | FHD  | Gross (kg):                  | 6.3  |
| Static Contrast Ratio:     | 3,000:1 (typ)  | DIMENSIONS (METRIC) (WXH     | IXD)   |
| Dynamic Contrast Ratio:    | 80M:1  | Packaging (mm):              | 680 x 510 x 144  |
| Light Source:              | LED  | Physical (mm):               | 611 x 437 x 192  |
| Brightness:                | 280 cd/m2 (typ)  | Physical Without Stand (mm): | 611 x 361 x 73   |
| Colours:                   | 16.7M  | GENERAL                      |  |
| Colour Space Support:      | 8 bit (6 bit + A-FRC)  | Regulations:                 | CE, CE EMC, CB, RoHS, ErP,   |
| Aspect Ratio:              | 16:9   | Negulations.                 | REACH, WEEE, EAC, UkrSEPRO,<br>BSMI, RCM, GEMS   |
| Response Time (MPRT):      | 1ms  | PACKAGE CONTENTS:            | VX2758-PC-mh x1, 3-pin Plug (IEC<br>C13 / CEE22) x1, HDMI Cable (v1.4;<br>Male-Male) x1, AC/DC Adapter x1,<br>Quick Start Guide x1 |
| Viewing Angles:            | 178° horizontal, 178° vertical   |                              |  |
| Backlight Life (Hours):    | 30000 Hrs (Min)  |                              |  |
| Curvature:                 | 1800R  | Recycle/Disposal:            | Please dispose of in accordance with local, state or federal laws.   |
| Refresh Rate (Hz):         | 144  | Warranty:                    | *Warranty offered may differ from  |
| Adaptive Sync:             | FreeSync   | warranty.                    | market to market   |
| Blue Light Filter:         | Yes  |                              |  |
| Flicker-Free:              | Yes  |                              |  |
|                            | NTSC: 88% size (Typ)   |                              |  |
| Colour Gamut:              | sRGB: 120% size (Typ)  |                              |  |
| Pixel Size:                | 0.311 mm (H) x 0.311 mm (V)  |                              |  |
| Surface Treatment:         | Anti-Glare, Hard Coating (3H)  |                              |  |
| COMPATIBILITY              |  |                              |  |
| PC Resolution (max):       | 1920x1080  |                              |  |
| Mac® Resolution (max):     | 1920x1080  |                              |  |
| PC Operating System:       | Windows 10 certified; macOS tested   |                              |  |
| Mac® Resolution (min):     | 1920x1080  |                              |  |
| CONNECTOR                  |  |                              |  |
| VGA:                       | 1  |                              |  |
| 3.5mm Audio In:            | 1  |                              |  |
| 3.5mm Audio Out:           | 1  |                              |  |
| HDMI 2.0:                  | 1  |                              |  |
| HDMI 1.4:                  | 1  |                              |  |
| Power in:                  | External power adapter   |                              |  |
| AUDIO                      |  |                              |  |
| Internal Speakers:         | 2Watts x2  |                              |  |
| POWER                      |  |                              |  |
| Eco Mode (Conserve):       | 18W  |                              |  |
| Eco Mode (optimised):      | 21W  |                              |  |
| Consumption (typical):     | 24.5W  |                              |  |
| Consumption (max):         | 26W  |                              |  |
| Voltage:                   | AC 100-240V, 50/60 Hz  |                              |  |
| Stand-by:                  | 0.5W   |                              |  |
| Power Supply:              | External   |                              |  |
| ADDITIONAL HARDWARE        |  |                              |  |
| Kensington Lock Slot:      | 1  |                              |  |
| CONTROLS                   |  |                              |  |
| Physical Controls:         | Up, Right, Down, Left, Power   |                              |  |
| On Screen Display:         | Input Select, Audio Adjust,<br>ViewMode, Colour Adjust, Manual<br>Image Adjust, Setup Menu |                              |  |
| OPERATING CONDITIONS       |  |                              |  |
| Temperature:               | 32°F to 104°F (0°C to 40°C)  |                              |  |
| Humidity (non-condensing): | 20% to 90%   |                              |  |
| INPUT SIGNAL               |  |                              |  |
| Frequency Horizontal:      | 15 ~ 160KHz  |                              |  |
| Frequency Vertical:        | 48 ~ 144Hz   |                              |  |
| VIDEO INPUT                |  |                              |  |
| Digital Sync:              | TMDS - HDMI (v1.4), TMDS - HDMI (v2.0)   |                              |  |
| Analog Sync:               | Separate/Composite/SOG - RGB<br>Analog   |                              |  |

Copyright © ViewSonic Corporation 2000-2020. All rights reserved.