

ViewSonic® LED DISPLAY **VX3211-mh**


Key Features

- Full HD 1080p resolution
- SuperClear® IPS technology
- HDMI and VGA for flexible connectivity
- Dual integrated speakers
- Flicker-Free & Blue Light Filter eyecare technologies



Product Description

The ViewSonic VX3211-mh is a 32" Full HD monitor featuring SuperClear® IPS panel technology, designed to take you to a higher level of viewing pleasure for both work and entertainment. With VX3211-mh's Full HD resolution and SuperClear® IPS panel technology, users will experience an excellent combination of clarity and detail from any viewing angle. A mega dynamic contrast ratio of 80M:1 gives images more depth, improving the user experience when viewing entertainment or working on graphic design. Built-in HDMI and VGA ports can support a wide range of devices to offer flexibility for fulfilling your connection needs. VX3211-mh's minimalist appearance with a slim fishtail shaped stand and matte finish make this monitor the perfect fit for offices and homes of any style. Furthermore, VX3211-mh also comes equipped with ECO-mode, which not only reduces energy consumption but also improves visibility and reduces eye fatigue.

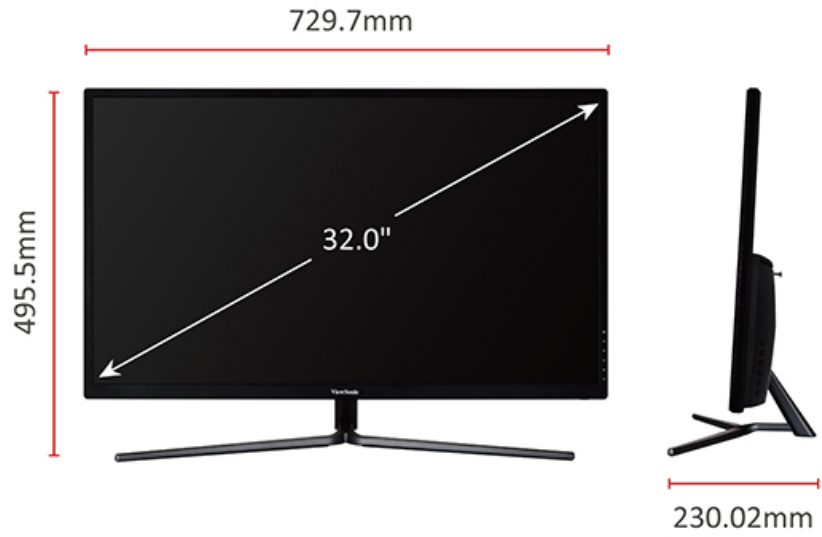

- 1. Power
- 2. HDMI
- 3. VGA
- 4. Audio In
- 5. Audio Out

Visit Us ■ www.viewsonic.com

DISPLAY

Monitor Size:	32"W (31.5" Viewable) LCD monitor
Panel Technology:	IPS
Resolution:	Full HD 1920 x 1080
Display Area:	698 mm (H) x 393 mm (V)
Aspect Ratio:	16:9
Brightness:	250 cd/m2 (Typ)
Contrast Ratio:	1200:1 (Typ)
Dynamic Contrast Ratio:	80,000,000:1
Viewing Angle:	178 degrees / 178 degrees (Typ)
Response Time:	GTG: 3ms
Colours:	Depth: 16.7M colors (True 8 bits)
Pixel Pitch:	0.364mm (H) x 0.364mm (V)

INPUT SIGNAL

Frequency:	Fh = 24 ~ 83KHz ; Fv = 50 ~ 75Hz
Sync:	Separate Sync / Composite Sync / Sync on Green

COMPATIBILITY

PC:	Windows 10 certified
Mac®:	Power Mac tested

CONNECTOR

Digital:	HDMI x 1
Analog:	VGA x 1
Audio Out:	Earphone out x 1
Audio In:	Audio in x 1

SPEAKERS

2.5W x 2

POWER

Power:	3-pin plug (CEE22) x 1
Voltage:	AC 100-240V (Universal); 50/60Hz
Consumption:	37W
Optimize:	32W
Conserve:	27W

ERGONOMICS

Tilt:	13 ~ -5 degrees
-------	-----------------

WALL MOUNT

VESA®:	100mm x 100mm
--------	---------------

OPERATING CONDITIONS

Temperature (° F / ° C):	32°F to 104°F (0°C to 40°C)
Humidity:	20% to 90% (no condensation)

DIMENSIONS (W X H X D) (MM)

Physical with stand (mm):	730mm (W) x 496mm (H) x 230mm (D)
Physical without stand (mm):	730mm (W) x 433mm (H) x 58mm (D)
Packaging (mm):	838mm (W) x 615mm (H) x 282mm (D)

WEIGHT

Net with stand (kg):	7.01kg
Net without stand (kg):	6.16kg
Gross (kg):	10.22kg

REGULATION

CE, REACH, WEEE, EAC, UkrSEPRO

PACKAGE CONTENTS

LCD Display
Power Cable (1.5m)
HDMI Cable (1.5m)
Audio Cable (1.5m)
Quick Start Guide
*Actual content may differ from market to market