



LED DISPLAY

VX3258-2KPC-MHD


Key Features

- 1ms MPRT response time
- 144Hz refresh rate
- AMD FreeSync™ technology
- 88% NTSC & 120% sRGB wide colour gamut size
- WQHD 1440p resolution



Product Description

The ViewSonic VX3258-2KPC-mhd's 1800R curved screen and WQHD resolution offer an immersive viewing experience with stunning detail. The monitor's 88% NTSC, 120% sRGB colour size delivers vivid colours and well-balanced image quality, while its 1ms response time and minimal input lag provide unprecedented screen quality and speed. A 144Hz refresh rate makes animations more smooth and AMD FreeSync™ technology virtually eliminates screen tearing and stuttering for a fluid gaming experience. The VX3258-2KPC-mhd also comes equipped with ViewSonic's exclusive ViewMode™ presets, which offer optimised screen performance for different home entertainment applications, such as watching movies, editing, or playing video games. Two HDMI and two DisplayPort inputs offer flexible connectivity for both general use and entertainment. *This monitor is GeForce Driver G-Sync Enable-Ready [Disclaimer].

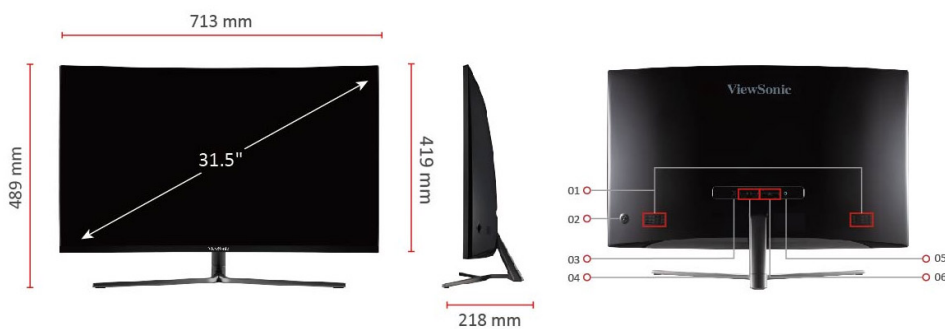

1. Internal Speakers
2. Menu Controls
3. DC in
4. HDMI x 2
5. Earphone
6. DisplayPort x 2

Visit Us  www.viewsonic.com

DISPLAY

Display Size (in.):	32
Viewable Area (in.):	31.5
Panel Type:	VA Technology
Resolution:	2560 x 1440
Resolution Type:	QHD
Static Contrast Ratio:	3,000:1 (typ)
Dynamic Contrast Ratio:	80M:1
Light Source:	LED
Brightness:	300 cd/m2 (typ)
Colours:	16.7M
Colour Space Support:	8 bit + Hi-FRC
Aspect Ratio:	16:9
Response Time (MPRT):	1ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Panel Surface:	Anti-Glare, Hard Coating (3H)
Curvature:	1800R
Refresh Rate (Hz):	144
Adaptive Sync:	FreeSync
Blue Light Filter:	Yes
Flicker-Free:	Yes
Colour Gamut:	NTSC: 88% size (Typ) sRGB: 120% size (Typ)
Pixel Size:	0.272 mm (H) x 0.272 mm (V)

COMPATIBILITY

PC Resolution (max):	2560x1440
Mac® Resolution (max):	2560x1440
PC Operating System:	Windows 10 certified; macOS tested
Mac® Resolution (min):	2560x1440

CONNECTOR

3.5mm Audio Out:	1
HDMI 2.0 (with HDCP 2.2):	2
Display Port:	2
Power in:	External power adapter

TOUCH**AUDIO**

Internal Speakers:	2.5Watts x2
--------------------	-------------

POWER

Voltage:	AC 100-240V, 50/60 Hz
Power Supply:	External

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	Up, Right, Down, Left, Power
On Screen Display:	Input Select, Audio Adjust, ViewMode, Colour Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT**INPUT SIGNAL**

Frequency Horizontal:	22 ~ 222KHz
Frequency Vertical:	48 ~ 144Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.2)
---------------	---

ERGONOMICS

Tilt (Forward/Back):	-5° / 10°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	13
Net Without Stand (lbs):	11
Gross (lbs):	19.6

WEIGHT (METRIC)

Net (kg):	5.9
Net Without Stand (kg):	5
Gross (kg):	8.9

DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	30.6 x 22.4 x 6.6
Physical (in.):	28.1 x 19.3 x 8.6
Physical Without Stand (in.):	28.1 x 16.5 x 3.1

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	776 x 569 x 167
Physical (mm):	713 x 489 x 218
Physical Without Stand (mm):	713 x 419 x 79

GENERAL

Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, RCM, KC, e-Standby, BIS
--------------	--

PACKAGE CONTENTS:	VX3258-2KPC-mhd x1, 3-pin Plug (IEC C13 / CEE22) x1, DisplayPort Cable (v1.2; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
-------------------	---

Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
-------------------	--

Warranty:	*Warranty offered may differ from market to market
-----------	--

Country Of Origin:	China
--------------------	-------