## VC-B20D

## High Definition PTZ Camera



The Lumens™ VC-B20D HD Pan/Tilt/Zoom (PTZ) camera is equipped with a professional I/2.8 inch image sensor with Full HD I080p output resolution at a high dynamic image of 60 frames per second. The superior 5x optical zoom lens, excellent white balance, and exposure mode deliver a clear image even in low light or the extreme contrast of brightness and darkness in a conference room. The camera covers a wide shooting angle and achieves high-speed, quiet, and precise positioning with smooth PTZ operations. There are up to I28 preset settings and stable remote controlling for effective and efficient presentations. The VC-B20D is applicable for lecture recording, videoconferencing, and security surveillance systems, thereby delivering a continuous, clear, and vivid live image without any distortions.

### **Key Features**

- Full HD 1080p high definition signal output format with a high frame rate of 60 fps
- 60 times variable zoom ratio (5x optical zoom with 12x digital zoom)
- DVI-I video output interface
- Horizontal viewing angle: 70°
- Wide range Pan/Tilt/Zoom actions:
   Pan angle from -100° to +100°; tilt angle from -30° to +30°
- Up to 128 user-defined preset modes to allow for ease of use in all environments



### **More Details**



### **Image Quality**

The VC-B20D is equipped with a professional 1/2.8 inch image sensor with Full HD 1080p output resolution. The sensor provides high color reproduction, high-definition signals, and crystal-clear image quality.



#### Wide Range Pan/Tilt/ Zoom Action

The VC-B20D has a wide shooting area (pan angle from -100° to +100°; tilt angle from -30° to +30°), as well as quiet, fast, and precise positioning movements.



#### **128 Position Presets**

The VC-B20D has up to 128 preset settings for pan, tilt, zoom, focus, exposure, and white balance modes for more effective and efficient video recording.




# RS-232 Remote Control

The camera's settings and PTZ control functions can be performed remotely at any location and at high communication speeds via the RS-232 interface.



### **Friendly Interface**

The Lumens<sup>™</sup> infrared controller is a simple operation that allows the VC-B20D to pan, tilt, zoom, and focus easily.



# Panoramic Viewing Angle


The VC-B20D has a panoramic 70° horizontal field of view that helps users achieve a wider viewing area. The VC-B20D is an ideal device for videoconferencing, customer service, and enterprise training.

### **Product Specifications**

Sensor	1/2.8" 2 MP CMOS
Video Output	1080p 60 / 50 / 30 / 25 fps, 1080i 50 / 60 fps, 720p 60 / 50 / 30 / 25 fps
Optical Zoom	5x
Panning Angle	-100° ~ +100°
Tilting Angle	-30° ~ +30°
Preset Positions	128
Video Output(HD) Interface	DVI-I
Camera Control Interface/Protocol	RS-232
Video S/N Ratio	> 50dB
Shutter Speed	1/1 ~ 1/10,000 sec
Focal Length	f = 4 ~ 20 mm

Horizontal Viewing Angle	70°
Aperture	F2.8 ~ 3.9
Minimum Illumination	1.6 lux (F2.8, 50 IRE, 60fps)
Minimum Object Distance	50(Wide) ~ 1000(Tele) mm
Digital Zoom	12x
Gain Control	Auto, manual
White Balance	Auto, indoor, outdoor, one-push, manual
Exposure Control	Auto, manual
Focus System	Auto, manual
Weight	1.3 kg (2.9 lbs)
Dimension (W x D x H)	267.7 x 123 x 155.6 mm ( 10.5" x 4.8" x 6.1")

### I/O CONNECTIONS

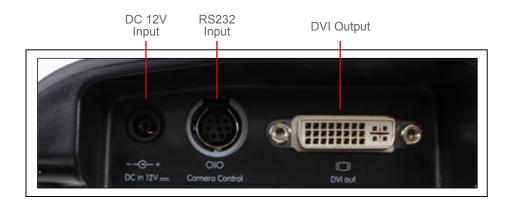

# **Optional Accessory**

VC-AC03 Wall Mount



Lumens

Brilliance by Design

www.MyLumens.com

Lumens Integration, Inc. 4116 Clipper Court Fremont, CA 94538 Phone: 888.542.3235 Fax: 510.252.1389 Lumens Europe Stationstraat 5 1730 Asse, Belgium Phone: +32 (0) 2 452 76 00 Fax: +32 (0) 2 452 76 00