

PLUS

Digital Flip chart for any rooms

Compact, Light-weight and stylish



NF-20

*Write
Save
Print*



Advanced features



USB Port in FRONT

You can save the information on the board with USB .

Front – facing USB port make it easy to insert the USB memory stick.



Simple PC connection

Simply connect your PC to the Copyboard via the USB cable to save the information on the board. No software is required.



Print the contents

You can print the contents on the board. Date, Header, Footer setting are available for the prints.




Magnet surface

Use magnets to stick drawings and the like onto the board

Networkability is very convenient

The board is accessible via browser- no PC connection to save the information. You can now simply view your information over a network..

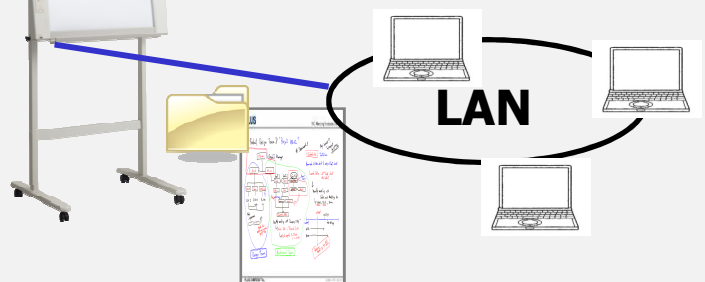

Work with your smartphone & Tablet

You can control the copyboard remotely with your smartphone or tablet. You can feed and scan the data on the board away from it.

Scanned data retrieved via WiFi can be distributed by e-mail, printed with AirPrint compatible printer and transferred to cloud services such as Evernote.



BOARD TYPE (Model name)			NF-20
Form	Installation method		Wall-hanging or self-standing type (T-legged)*1
	External dimensions (T-shaped legs*1)		W830 × D72 × H955 mm
	Main unit weight		10 kg
	External dimensions of the T-legged stand (including the main body)*1		W830 × D674 × H1850*3 mm
	T-shaped legs weight*1*2		8.3 kg
BOARD	Panel Size		H650 × W910 mm
	Effective reading size		H630 × W900 mm
	Number of Pages		2
	Paging		Endless in one direction (Horizontal scrolling)
	Drive method		Sheet movement
	Reading method		CIS (Contact Image Sensor)
	Reading illumination light source		RGB LED
	Reading resolution		Main scanning direction (vertical sheet surface) 1.92 dots/mm (50 dpi or equivalent) Sub scanning direction (horizontal sheet surface) 1.92 dots/mm (50 dpi or equivalent)
	Reading time		Black & white: approx. 8 Secs. Color: approx. 8 Secs.
Interface	Board	File format	JPEG, PNG, PDF
		Screen size	Standard type: 624 × 824 dots (fixed) High Resolution: 1248 × 1728 dots (fixed)
	External memory	Type	USB Flash memory*4
		Compatible FAT types	FAT 16, 32
		Interface	USB2.0
	Network	LAN port	RJ-45 (10Base-T/100Base-TX)
	Printing	Printing resolution	300 dpi or equivalent
		No. print colors	8-tone color or 2-tone monochrome
		Printer interface	USB2.0
Added functions	Clock		Used for the timestamp and for file dating properties
	PC connection		Images can be acquired and device settings made via USB (using a browser)
Power supply	AC power adapter		Input : AC100–240V/50–60 Hz, Max 0.75 A Output : DC 12 V, 3.0 A
	Power consumption		In standby: 3 W, During operation: 8 W (not including printer)
Operating conditions	Temperature:		10–35°C
	Humidity:		30–85% (No condensation)
Miscellaneous	Ruled lines		34 mm cross-ruled squares
	Miscellaneous		Dedicated markers (black, red, blue, and green)
Operating environment	Web browser		Windows: Internet Explorer Version XP, VISTA, 7.0, 8.0 or above Macintosh: Mac OS X 10.5, Safari Version 5 or above * Enable JavaScript.

Remarks

*1: T-legged (stand) is sold separately. The height of the stand can be adjusted in 2 steps - 1850 and 1650 mm. The inclination angle can be adjusted in three steps - 0, 7 and 10 degrees.

*2: Printer tray is sold separately.

*3: The maximum dimension is indicated for the height (H).

*4: The device does not come with a USB memory stick.

• Please note that for quality improvement purposes, specifications and design are subject to change without prior notice.