



The research carried out by Adeo on tensioning systems has reached a new record, crossing the threshold of the 3.5 m base with the Alumid screen. Marked by the quality of its in-built roller and solidity of the entire structure, this screen can be used in the Tensio version. The CTS (Constant Tension System) provides constant self-tensioning through time, obtained through two counterweights hooked onto hinges at the ends of the screen's base, which tension the rigid cables threaded through the lateral eyelets. During screen rolling the eyelets remain outside the edge of the surface, thus avoiding the formation of annoying creases (see page 8). A must for providing high quality projection even in large-scale environments and in the presence of a vast audience.

Create your own screen with the PSS:


- > **personalized dimensions:** width and height
- > **roller type:** standard motorized and radio integrated
- > **case:** available only with case
- > **case color:** available in white or black
- > **projection surfaces:** ReferenceWhite, ReferenceGrey, VisionWhite, VisionWhitePro, VisionAcoustik and Vision MacroAcoustik only with black borders
- > **height of top:** from 10 to 45 cm
- > **projection surface drop:** front or rear
- > **side of command/motor:** right or left

Standard accessories:

- > kit with wall -or ceiling- quick mount brackets
- > unipolar selector switch
- > remote control (only for radio-integrated version)




Optional accessories:

- > receiver and RF remote control for motorized screen (3 modalities: basic, automatic and compatible with domotic systems)
- > receiver and infrared remote control
- > bracket extensions for screens up to 60 cm

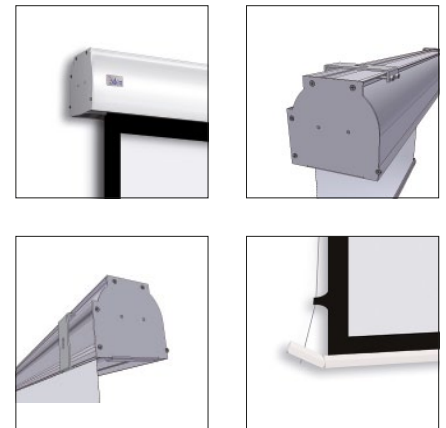

Format	Overall Width	Overall Height	Surface Width	Surface Height	Net Surface Width	Net Surface Height	Standard Top	Maximum Total Top	Diagonal Inches	Shipment Sizes	Net Weight	Gross Weight
	A	E	F	G	H	I	P	cm	O	cm	kg	kg
4:3	406	305	373	287	363	272	10	20	179	425x20x21	36	42
	456*	342	423	325	413	310	10	20	203	475X20X21	41	45
16:9	406	237	373	219	363	204	10	45	164	425x20x21	35	41
	456*	265	423	247	413	232	10	45	187	475X20X21	40	46
16:10	406	259	373	242	363	227	10	20	169	425x20x21	35	41
	456*	291	423	273	413	258	10	20	192	475X20X21	40	46
21:9	406	187	373	169	363	154	10	45	155	425x20x21	35	41
	456*	208	423	191	413	176	10	45	177	475X20X21	40	46

*Not available with VisionWhitePro surface

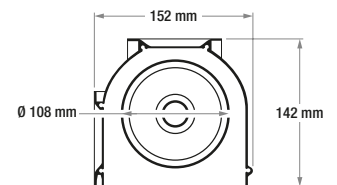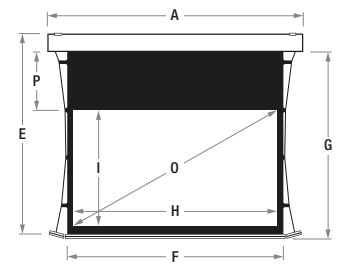

Standard formats

1.78:1	1.33:1
16:9	4:3

PSS formats

2.35:1	1.85:1	1.6:1	1.25:1	1.00:1
21:9	16:10	5:4	1:1	

Surfaces Fireproof Certification

B1	M1
----	----