

# ViewSonic® PROJECTOR PX703HD


## Key Features

- 1.3X optical zoom
- SuperColor™ technology
- Energy-efficient SmartEco+ Mode
- Vertical Lens Shift
- vColorTuner



## Product Description

The ViewSonic PX703HD is a practical Home Cinema Projector, featuring 3500 ANSI lumens, 1080p Full HD resolution, and ViewSonic's exclusive SuperColor™ technology, which together produce the finest of details and stunning colour in any medium sized space. The projector comes with an energy-saving SuperEco+ mode that reduces power consumption and extends lamp life to up to 20,000 hours, reducing the frequency of lamp replacement and lowering maintenance costs. Digital lens shift and H/V keystone help users easily set up the projector at any angle. Dual HDMI input and USB power supply further increase the flexibility of the user's entertainment experience.

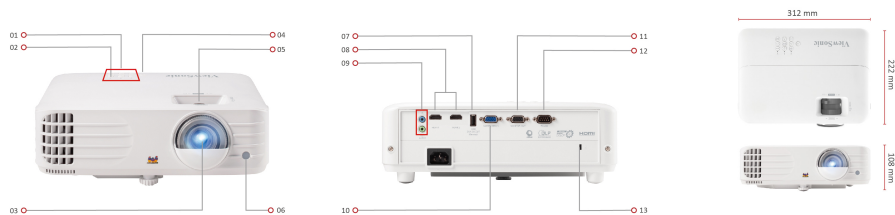

1. Keypad
2. LED Indicator
3. Lens
4. Power Key
5. Zoom/Focus
6. Front IR
7. USB Type A

8. HDMI Port
9. Audio In/Out
10. Computer In
11. Computer Out
12. RS-232
13. Kensington Lock

Visit Us  [www.viewsonic.com](http://www.viewsonic.com)

**SPECIFICATION**

Native Resolution:	1920x1080
DMD Type:	DC3
Brightness:	3500 ANSI Lumens
Contrast Ratio with SuperEco Mode:	12000:1
Display Colour:	1.07 Billion Colours
Light Source Type:	Lamp
Light Source Life (Normal):	5000
Light Source Life (SuperEco):	20000
Lamp Watt:	203W
Lens:	F=1.9-2.47, f=12-15.6mm
Projection Offset:	110%+/-6%
Throw Ratio:	1.13-1.47
Optical Zoom:	1.3x
Digital Zoom:	0.8x-2.0x
Image Size:	30"-300"
Throw Distance:	0.75m-9.76m (100"@2.5m)
Keystone:	+/- 40° (V)
Lens Shift V. Range:	Yes (+/- 5%)
Audible Noise (Normal):	31dB
Audible Noise (Eco):	27dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB-Reduced Blanking
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz

**INPUT**

Computer in (share with component):	1
HDMI:	2 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1

**OUTPUT**

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	10W
USB Type A (Power):	1 (5V/ 1.5A)

**CONTROL**

RS232 (DB 9-pin male):	1
------------------------	---

**OTHERS**

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 300W Standby: <0.5W
Operating Temperature:	0~40°C
Net Weight:	2.62kg
Dimensions (WxDxH) with Adjustment Foot:	312x222x108mm

OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages
---------------	---

**STANDARD ACCESSORY**

Power Cord:	1
VGA Cable:	1
Remote Control:	1
QSG:	1

**OPTIONAL ACCESSORY**

Lamp/Light Source:	RLC-123
--------------------	---------