



PROJECTOR
X100-4K


Key Features

- True 4K UHD visual experience
- Cinema SuperColor+™ Technology with 125% Rec.709
- 2nd generation LED technology with 30,000 hours lifespan
- Wide H/V lens shift for flexible installation
- Extremely low fan noise (20 dB) ensuring pure viewing



Product Description

ViewSonic's X100-4K is a 2,900 LED Lumens 4K UHD home cinema projector of superior performance and great value. Fulfilling movie lovers' dreams with 2nd generation LED technology, for cinematic colors and reliable light source life, low fan noise (20 dB), wide H/V lens shift and optical zoom combined into a proprietary design, the X100-4K serves as a professional choice for every home.

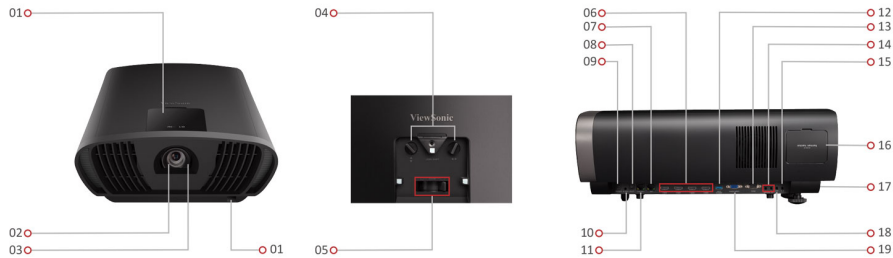

- | | | |
|------------------------------|---------------------------|----------------------------|
| 01. IR Receiver(Front & Top) | 04. S/PDIF Out | 06. Audio Out |
| 02. Lens | 05. Service | 07. Keypad |
| 03. Motorized Lens Cover | 08. Wire IR | 08. Wi-Fi Dongle(Optional) |
| 04. Lens Shift Control Knob | 09. Control | 09. AUX |
| 05. Zoom Ring | 10. USB Reader 3.0(5V/2A) | 10. Computer In |
| 06. HDMI 2.0/HDCP 2.2 | 11. RS232 | |
| 07. LAN | 12. 12V Trigger X2 | |

Visit Us ■ www.viewsonic.com

SPECIFICATION

Native Resolution:	3840x2160
Brightness:	2900 (LED Lumens)
Contrast Ratio:	3000000:1
Display Color:	1.07 Billion Colors
Light Source Type:	LED
Light Source Life (Normal):	up to 30000
Lamp Watt:	RGBB LED
Lens:	F1.8-1.825, f=12.62-15.13mm
Projection Offset:	0%
Throw Ratio:	1.2-1.44
Optical Zoom:	1.2x
Image Size:	40"-200"
Throw Distance:	1.06m-6.37m , (100" @2.65m)
Keystone:	+/- 40° (V)
Lens Shift V. Range:	Yes (+60%, -0%)
Lens Shift H. Range:	Yes (+25%, -25%)
Audible Noise (Normal):	23dB
Audible Noise (Eco):	20dB
Local Storage:	Total 16GB , (12GB available storage)
Resolution Support:	VGA(640 x 480) to , 4K(3840 x 2160)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160P
Horizontal Frequency:	30K-97KHz
Vertical Scan Rate:	24-120Hz

INPUT

Computer in (share with component):	1
HDMI:	4, (HDMI 2.0, HDCP 1.4/2.2)
Audio-in (3.5mm):	1
3D VESA (Sync):	1
USB Type A:	2, (USB3.0 Reader x1,, USB2.0 Reader x1)
RJ45 Input:	1, (Internet)

OUTPUT

Audio out (3.5mm):	1
S/PDIF:	1
Speaker:	20W cube x2
USB Type A (Power):	2, (USB3.0 - 5V/ 2A x1,, USB3.0 - 5V/ 900mA x1,, share with USB A Input)
12V Trigger (3.5mm):	2

CONTROL

RS232 (DB 9-pin male):	1 (Female)
RJ45:	1, (LAN control)
USB Micro B-2.0 (Services):	1

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz, (AC in)
Power Consumption:	Normal: TBD, Standby: <0.5W
Operating Temperature:	0~40°C
Net Weight:	7.70kg (TBD)
Dimensions (WxDxH) with Adjustment Foot:	416x463x183mm

OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages
---------------	---

STANDARD ACCESSORY

Power Cord:	1
Remote Control:	1, (w/ backlit : VSE / VSI ; , w/o backlit : VSA / VSCN)
QSG:	1

OPTIONAL ACCESSORY