



**Lyzard-KZ14**



**Lyzard-KZ14W**

## Description

The Lyzard-KZ14 is a remarkable ultramicro line array designed for discreet use in a variety of intimate environments such as retail, restaurants, bars and museums. The rugged enclosure contains a line array of 4 x 0.5" long excursion, full-range drivers housed in a sleek case built around a super strong aluminum chassis.

The high efficiency drive units have neodymium magnet structures and suspensions engineered for maximum linear excursion and minimum residual transducer noise. This miniature, slim column is only 2.2 cm wide and delivers true crystal clear audio with an amazing output of 92 dB continuous – remarkable from such a miniscule enclosure!

Improving upon the practicality of setup of its predecessor, the KZ14 is an installer's dream with the inclusion of a magnetic adhesive plate to attach to

the wall so that to attract the speaker's back ferritic stainless steel plate. For a more permanent installation, the introduction of a hidden through-hole allows for more secure mounting.

Easier connection is also attainable with a 2-pin screw connector designed to hide cables for maximum discreetness.

The system delivers long throw and coherent coverage making it ideal for use in space constrained situations. Lyzards can be integrated with the KU sub bass line, extending the frequency range to 35 Hz.

The KZ14 weighs a mere 65 g and measures 2.2 x 10 x 1.2 cm. All the KZ14 components are designed at our Florence-based R&D department. They are custom manufactured to our exact standards and quality control system in Italy.

Colors		Premium Finishes		Features		Frequent Applications	
Black		Gold		Visually Discrete	Pure Array Technology (PAT)	Retail	Cafes, Bistros & Restaurants
White		Polished		Weather Resistant		Museum	Broadcast & Studios
Custom		Brushed		Lightweight		Hotels	Retail

Accessories					
K-DOCKZ	K-FLUSH2				

## Technical Specifications

General	
Type	Line array
Transducers	4 x 0.5" neodymium magnet woofers
Frequency Response <sup>1</sup>	500 Hz – 18 kHz (-6 dB)
Max SPL <sup>2</sup>	98 dB (peak)
Rated Power	15 W
Coverage	V. 40°   H. 140°
Connectors	IN+ IN- screw terminals
Nominal Impedance	16 Ω


Handling & Finishes	
Dimensions (WxHxD)	22 x 100 x 11 mm (0.9 x 3.9 x 0.4 in)
Weight	0,059 kg (0.130 lb)
Material	Aluminium
Colors	Black, White, Custom RAL
Finishes	24K Gold, Polished, Brushed

Regulations	
IP Rating	IP64

Accessories	
Recommended Amplifier	Kommander-KA02, Kommander-KA14
Accessories	K-DOCKZ, K-FLUSH2

<sup>1</sup> With dedicated preset.

<sup>2</sup> Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 1 m

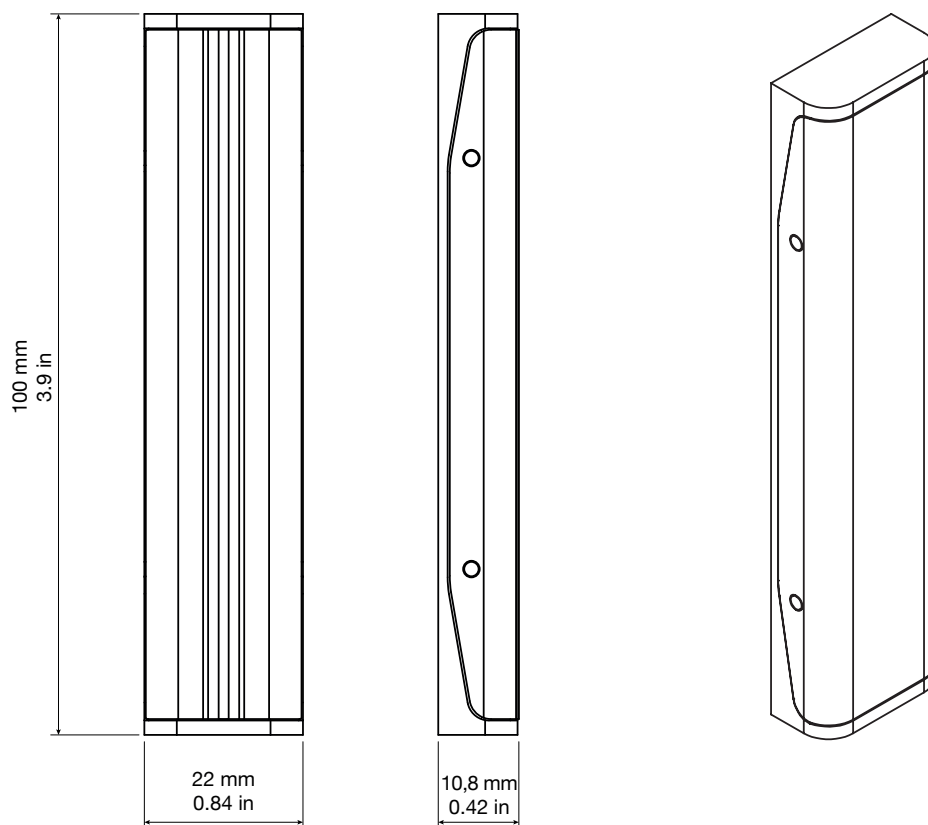

### Notes for data:

Passive loudspeakers requires dedicated preset loaded on board of K-array amplifiers.  
 New materials and design are introduced into existing products without previous notice.  
 Present systems may differ in some respects from those presented in this catalogue.