



array bass element



Description

The Rumble-KU212 is an ultra-thin, highpower passive subwoofer designed as the perfect companion to the K-array's Installed Sound speakers. A combination of extended frequency response with prodigious output and a discreet form factor make the KU212 an ideal solution for complex medium and large-format projects like clubs, lounges and live concerts. The largest of K-array's Rumble subwoofer line, the KU212 is comprised of a 12" neodymium transducer combined with a 12" passive transducer. The KU212 is made entirely up of steel, making it extremely resistant, even when deployed outside in tough weather conditions. This makes it ideal for aquatic environments where ordinary bass speakers would corrode. It is impenetrable by foreign objects such as dust, sand or water, which over time can ruin a speaker. KA series amplifiers have presets specifically optimized for KU212 applications. Measuring at $33 \times 65.5 \times 20$ cm and weighing 18kg, the KU212 is available in elegant black or subtle while and can be customized in any RAL color as well as brushed, polished or 24 K gold-plated finishes, making it easy to blend in or grab attention depending on your aim, in a variety of spaces.

Colors	Premium Finishes	Features	Frequent Applications	
Black	Gold	Visually Disceete	Theme Parks	Theaters
White	Polished	Weather Resistent	Cinemas	Broadcast & Studios
RAL (RA)	Brushed	Selectable Impedence	Cafes, Bistros & Restaurants	Event Productions

Accessories				
K-2SPK	K-FLY2B	K-FLY22	K-JOINT2B	




Technical Specifications


General	
Туре	Point source subwoofer
Drivers	1x 12" Neodymium magnet with 2" voice coil 1x 12" passive transducer
Frequency Response	35 Hz – 150 Hz (-6 dB) ⁽¹⁾
Sensitivity	100 dB (2)
Rated Power	700W
Maximum SPL	124 dB (cont.) – 130 dB (peak) ⁽³⁾
Nominal Impedance	4 / 16 Ω selectable
Crossover	External crossover required Low-pass @ 150 Hz
Coverage	Omni

Controls and Connectivity	
Connectivity	Phoenix MSTB 2,5/ 4-ST-5,08 BK - 1758843 1+ 1- / 2+ 2- serial or parallel configuration (see manual)

Handling and Finish	
IP Rating	IP54 (Improved water protection with K-KUIP accessory)
Dimensions & Weight	65,0 cm x 33,0 cm x 20,0 cm (25.8" x 13.0" x 7.9") 18,5 kg (40.8 lbs)
Finish	Balck, White, Custom RAL color Premium brushed, polished stainless steel/gold finishes
Finish	Balck, White, Custom RAL color Premium brushed, polished stainless steel/gold finishes

Accessories	
Recommended Amplifier	KA24, KA84
Accessories	K-2SPK, K-FLY22, K-FLY2B, K-JOINT2B, K-PMOUNT, K-WALL2, K-WF212

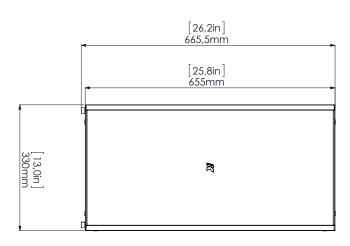



Notes for data: 1. Maximum RMS applicable power for a musical signal. The reference signal is the one proposed by EIAJ standard. New materials and design are introduced into existing products without previous notice. Present systems may differ in some respects from those presented in this catalogue.

atta da la