ViewSonic ME VX2485-MHU


Key Features

- iF award winning design
- Connection flexibility with USB Type-C, HDMI, and VGA
- SuperClear® IPS technology
- AMD FreeSync technology
- TUV certificated Flicker-Free and Blue Light
 Filter



Product Description

Elevate your home entertainment to the next level with the ViewSonic VX2485-MHU. Featuring an award-winning design with a ringed, rotational swivel for clean movement and cable management. With a SuperClear® IPS panel and a sleek frameless design, the monitor provides a near-seamless viewing experience which is ideal for multi-monitor setups. The VX2485-MHU comes with a USB Type-C port for audio/video transmission and device charging up to 60W; it is also equipped with HDMI and VGA for flexible connectivity options. In addition, the monitor features AMD FreeSync[™] which can virtually eliminate screen tearing and stuttering for fluid and smooth visuals. Included in the stand design are both swivel and tilt for a more comfortable viewing experience, while the TUV certificated low blue light and flicker free filter can minimize eye fatigue. Utilizing user friendly packaging offers a quick and easy out-of-the-box set-up.

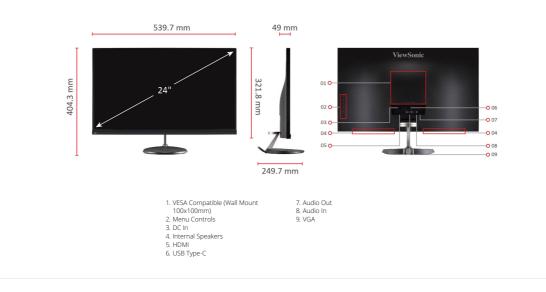

Visit Us – www.viewsonic.com

datasheet_VX2485-MHU

	di	atasheet_VX2485-MHU	
DISPLAY		VIDEO INPUT	
Display Size (in.):	24	Digital Sync:	TMDS - HDMI (v1.4), Micro-Packet -
Viewable Area (in.):	23.8		Type C Separate/Composite/SOG - RGB
Panel Type:	IPS Technology	Analog Sync:	Analog
Resolution:	1920 x 1080	ERGONOMICS	
Resolution Type:	FHD	Swivel:	60°
Static Contrast Ratio:	1,000:1 (typ)	Tilt (Forward/Back):	-5° / 20°
Dynamic Contrast Ratio:	80M:1	WEIGHT (IMPERIAL)	
Light Source:	LED	Net (Ibs):	9.3
Brightness:	250 cd/m2 (typ)	Net Without Stand (Ibs):	5.9
Colors:	16.7M	Gross (lbs):	12.8
Color Space Support:	8 bit (6 bit + A-FRC)	WEIGHT (METRIC)	
Aspect Ratio:	16:9	Net (kg):	4.2
Response Time (Typical GTG):	5ms	Net Without Stand (kg):	2.7
Viewing Angles:	178º horizontal, 178º vertical	Gross (kg):	5.8
Backlight Life (Hours):	30000 Hrs (Min)	DIMENSIONS (IMPERIAL) (W	XHXD)
Curvature:	Flat	Packaging (in.):	24.6 x 16.1 x 4.9
Refresh Rate (Hz):	76 (Max)	Physical (in.):	21.2 x 15.9 x 9.8
Adaptive Sync:	FreeSync	Physical Without Stand (in.):	21.2 x 12.7 x 2
Blue Light Filter:	Yes	DIMENSIONS (METRIC) (WX	HXD)
Flicker-Free:	Yes	Packaging (mm):	624 x 410 x 125
	NTSC: 72% size (Typ)	Physical (mm):	540 x 404 x 250
Color Gamut:	sRGB: 102% size (Typ)	Physical Without Stand (mm):	540 x 322 x 50
Pixel Size:	0.275 mm (H) x 0.275 mm (V)	GENERAL	
Surface Treatment:	Anti-Glare, Hard Coating (3H)		cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Bronze, CEC,
COMPATIBILITY		Regulations:	NRCan, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO,
PC Resolution (max):	1920x1080	Ŭ	
Mac® Resolution (max):	1920x1080		BSMI, VCCI, PSE
PC Operating System:	Windows 8.1/10 certified; macOS tested	PACKAGE CONTENTS:	VX2485-MHU x1, 3-pin Mickey Mouse Plug (IEC C5) x1, HDMI Cabl (v1.4; Male-Male) x1, USB Type-C Cable (Male-Male) x1, AC/DC
Mac® Resolution (min):	1920x1080		Adapter x1, Quick Start Guide x1
CONNECTOR		Recycle/Disposal:	Please dispose of in accordance with
VGA:	1		local, state or federal laws.
USB 3.1 Type C:	1	Warranty:	*Warranty offered may differ from market to market
3.5mm Audio In:	1		
3.5mm Audio Out:	1		
HDMI 1.4:	1		
Power in:	External power adapter		
AUDIO			
Internal Speakers:	3Watts x2		
POWER			
POWER Eco Mode (Conserve):	11W		
POWER Eco Mode (Conserve): Eco Mode (optimized):	11W 13W		
POWER Eco Mode (Conserve): Eco Mode (optimized): Consumption (typical):	11W 13W 15.5W		
POWER Eco Mode (Conserve): Eco Mode (optimized): Consumption (typical): Consumption (max):	11W 13W 15.5W 16W		
POWER Eco Mode (Conserve): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage:	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz		
POWER Eco Mode (Conserve): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage: Stand-by:	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W		
POWER Eco Mode (Conserve): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage: Stand-by: Power Supply:	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz		
POWER Eco Mode (Conserve): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage: Stand-by: Power Supply: ADDITIONAL HARDWARE	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W External		
POWER Eco Mode (Conserve): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage: Stand-by: Power Supply: ADDITIONAL HARDWARE Kensington Lock Slot:	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W External		
POWER Eco Mode (Conserve): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage: Stand-by: Power Supply: ADDITIONAL HARDWARE Kensington Lock Slot: Cable Organization:	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W External		
POWER Eco Mode (Conserve): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage: Stand-by: Power Supply: ADDITIONAL HARDWARE Kensington Lock Slot: Cable Organization:	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W External 1 Yes		
POWER Eco Mode (Conserve): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage: Stand-by: Power Supply: ADDITIONAL HARDWARE Kensington Lock Slot: Cable Organization:	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W External 1 Yes Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power)		
POWER Eco Mode (Conserve): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage: Stand-by: Power Supply: ADDITIONAL HARDWARE Kensington Lock Slot: Cable Organization: CONTROLS Physical Controls:	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W External 1 Yes		
POWER Eco Mode (Conserve): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage: Stand-by: Power Supply: ADDITIONAL HARDWARE Kensington Lock Slot: Cable Organization: CoNTROLS Physical Controls: On Screen Display: DEFRATING CONDITIONS	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W External 1 Yes Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power) Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu		
POWER Eco Mode (Conserve): Eco Mode (optimized): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage: Stand-by: Voltage: Stand-by: Power Supply: ADDITIONAL HARDWARE Kensington Lock Slot: Cable Organization: CONTROLS Physical Controls: Physical Controls: CONTROLS	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W External 1 1 Yes Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power) Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu		
POWER Eco Mode (Conserve): Eco Mode (optimized): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage: Stand-by: Voltage: Stand-by: Power Supply: ADDITIONAL HARDWARE Kensington Lock Slot: Controls: Controls: Physical Controls:	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W External 1 Yes Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power) Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu		
POWER Eco Mode (Conserve): Eco Mode (optimized): Eco Mode (optimized): Consumption (typical): Consumption (max): Consumption (max): Voltage: Stand-by: Voltage: Stand-by: Power Supply: ADDITIONAL HARDWARE Kensington Lock Slot: Cable Organization: CONTROLS Physical Controls: Physical Controls: CONTROLS DEFRATING CONDITIONS Temperature: Humidity (non-condensing): WALL MOUNT	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W External 1 Yes Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power) Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu 32°F to 104°F (0°C to 40°C) 20% to 90%		
POWER Eco Mode (Conserve): Eco Mode (optimized): Eco Mode (optimized): Consumption (typical): Consumption (max): Consumption (max): Voltage: Stand-by: Voltage: Stand-by: Power Supply: Conser Supply: Conser Display: Consere Display: Consere Display: Consere Conse	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W External 1 1 Yes Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power) Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu		
POWER Eco Mode (Conserve): Eco Mode (optimized): Eco Mode (optimized): Consumption (typical): Consumption (max): Voltage: Stand-by: Voltage: Stand-by: Power Supply: ADDITIONAL HARDWARE Kensington Lock Slot: Cable Organization: CONTROLS Physical Controls: Physical Controls: COPERATING CONDITIONS Temperature: Humidity (non-condensing): WALL MOUNT	11W 13W 15.5W 16W AC 100-240V, 50/60 Hz 0.5W External 1 Yes Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power) Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu 32°F to 104°F (0°C to 40°C) 20% to 90%		

Copyright © ViewSonic Corporation 2000-2020. All rights reserved.