ST02S 43"/ 55"

Smart Signage with Ultra-Thin Bezels





Without connecting any external processing device, the built-in **Android™ OS** allows you to access files, display contents, and start presentations directly on the display.



Edit, manage, and customise content through the **X-Sign Content Management**Software by using the 150+ templates available; with the **X-Sign Broadcast**, you can deliver instant announcement to all your BenQ's displays.



Combined with DMS Cloud and DMS Local, BenQ's **Device Management Solution** helps you easily manage all your BenQ displays at the same time and maximise the productivity for your workplace.



With the pre-installed **TeamViewer Meeting**, you can start video meetings with a simple click. The ST02S series is perfect for video conferencing solutions.


MODEL			ST4302S	ST5502S
Panel	Screen Size		43"	55"
	Resolution		UHD 3840 × 2160	UHD 3840 × 2160
	Brightness (Typ.)		400 nits	400 nits
	Contrast Ratio (Typ.)		1200: 1	1300: 1
	Viewing Angle (H/V)		178 degree (H) / 178 degree (V)	178 degree (H) / 178 degree (V)
	Response Time (G-t-G, ms)		8	8
	Backlight Life (hrs)		30,000	30,000
	Panel Surface		AG, Haze 1%	AG, Haze 3%
	Operating Hour		18 hrs / 7 days	18 hrs / 7 days
	Orientation		Landscape / Portrait	Landscape / Portrait
Platform Solution	System Memory		3GB	3GB
	Storage		16GB	16GB
	os		Android 8.0	Android 8.0
Power	Power Supply		100V~240V, 50-60Hz	100V~240V, 50-60Hz
	Power Consumption	Maximum (W/h)	150	185
		Typical (W/h)	110	134
		Standby Mode (W/h)	≤0.5W	≤0.5W
	AC Power Switch		Yes	Yes
	Wake Up		VGA / HDMI	VGA / HDMI
Environment	Operation Temperature		0°C ~ 40°C	0°C ~ 40°C
	Operating Humidity		10% ~ 80% RH Non-Condensing	10% ~ 80% RH Non-Condensing
	Energy Efficiency		Energy 8.0 Certified	Energy 8.0 Certified
Connectivity	Input	VGA	хI	×I
		DVI	хI	хI
		HDMI	2.0 × 2	2.0 × 2
	USB	Туре А	2.0 × 2	2.0 × 2
	RS232		Yes	Yes
	LAN		Yes	Yes
	Remote Controller		Yes	Yes
Audio	Internal Speaker		10W x 2	10W x 2
Mechanical	Dimension (mm)	Screen	973.0 × 561.2 × 63.5	1241.8 × 712.6 × 63.5
	Weight (kg)	Net Weight	10.7	16.6
		Gross Weight	14.3	22.0
	Bezel Width (mm)		13.9 / 13.9 / 13.9 / 13.9	13.9 / 13.9 / 13.9 / 13.9
	Wall Mounting (VESA) (Screw Type /Max. Length)		200 × 200 (4 holes); 4-M6 × I5L	400 × 400 (4 holes); 4-M6 × I5L
	OPS Slot		No	No
Unique Software Support	Wireless Presentation		InstaShare	InstaShare
	Media Content		X-Sign Broadcast	X-Sign Broadcast







INPUT AND OUTPUT TERMINALS

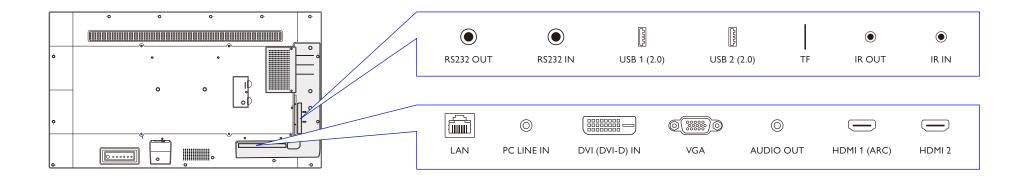

DIMENSIONS

