Switch to bigger collaborative spaces



Market leading displays

Epson, the market leader in projectors since 2001¹, offers display solutions with a superior viewing experience compared to flat panel screens, helping to increase audience engagement.

Introducing a wide range of innovative features for enhanced image quality, reliability and flexibility, Epson solutions are the clear choice.

Large, scalable displays to create agile working environments in a variety of spaces. Enjoy hassle-free connectivity for users and seamless connectivity to existing IT infrastructures.







Ultimate displays for hybrid working

Large displays provide a bigger space for remote attendees or learners to truly collaborate with colleagues or classmates in real time. Everyone feels included and represented whether at home or in the office or classroom.



Great content at the right size

The correct display size for your room maximises audience engagement. Unlike fixed flat panel displays, Epson's scalable solutions project incredible quality displays up to 500". Project images in up to 4KE resolution with rich colours and brightness up to three times that of 1-chip DLP projectors³.



Unrestricted viewing experiences

Epson display solutions avoid the glare, blind spots and fingerprints associated with flat panel displays and can be viewed clearly from anywhere in the room, creating equal opportunities and engagement for all.



Hassle-free connectivity

Epson display solutions offer both wired and wireless connectivity, and our iProjection App makes it easy for people to stream and share from their own devices².



An end to maintenance cycles

Epson's fit-and-forget display solutions combine performance with reliability, meaning lower costs, longer life cycles and impressive warranties of up to five years. You can count on up to 17,000 hours life for lamps and up to 30,000 hours for laser light sources, so for schools, that's over 12 years lamp-life, or over 21 years' laser-life based on normal school hours*.



A sustainable IT choice with TCO Certified

Unlike flat panels, many of our business projectors are TCO Certified⁴. This is independent affirmation that Epson is making responsible choices and reaching sustainability standards that are recognised across the globe.

^{*}Based on an estimated 200 school days per year and 7 hours lamp usage per day.

Why choose an Epson display?

When choosing the right display solution for your business or educational establishment, you'll soon discover Epson displays hold many advantages over flat panels.

Easier on the eye

Flat panels can appear pixelated when you view them close-up for long periods, causing tired eyes. Epson projectors are less pixelated and selected models feature automatic light adjustment, making for a comfortable experience.

Unrestricted viewing

Unlike flat panels, Epson projectors have no blind spots or restricted viewing angles, making it easier to see content even from the sides of a room. There are no visible finger marks left on the screen, and when using Epson displays with anti-bacterial whiteboard surfaces, it eradicates any breeding ground for bacteria and viruses.

Scalable displays

Thanks to scalability and flexibility, Epson projectors suit rooms and audiences of every size. Their ability to deliver large-scale, data-heavy content makes it more comfortable and engaging for the audience to view. With Epson projectors, you have the flexibility to scale a display up to 500", in multiple aspects ratios. You can also connect multiple projectors to create one large seamless display.

Mobile presenting

With most of our projectors, you aren't restricted to one room, one venue, one setting. They're lightweight, portable and easy to set up.

Easy and cost-effective to install

Flat panels are heavy, require strong walls and a lot more physical exertion to install. Connecting Epson projectors to your business couldn't be easier. Simple to install, they're also fully compatible with most industry-standard image software and collaboration tools.

Enterprise security with peace of mind

Thanks to Epson enterprise security, our projectors operate in a network that can't be accessed wirelessly without a password. Also, any saved data and annotations made on our interactive displays can be encrypted and password protected.



Make the sustainable choice

Unlike flat panels, many Epson business projectors are TCO Certified⁴, meeting the world's most comprehensive sustainability certification for IT products. To achieve that, we set the highest standards in our supply chains and factories, and offer environmentally responsible take-back and recycling schemes. This helps your organisation to meet your own social responsibility goals.




True colours, beautiful detail

Epson's 3LCD technology produces high-resolution images with rich, life-like colours at levels of brightness that make presentations clear and engaging, even in well-lit environments.

Images are up to three times brighter than 1-chip DLP projectors³ and achieve levels of quality, versatility and creative freedom greater than flat panel displays.





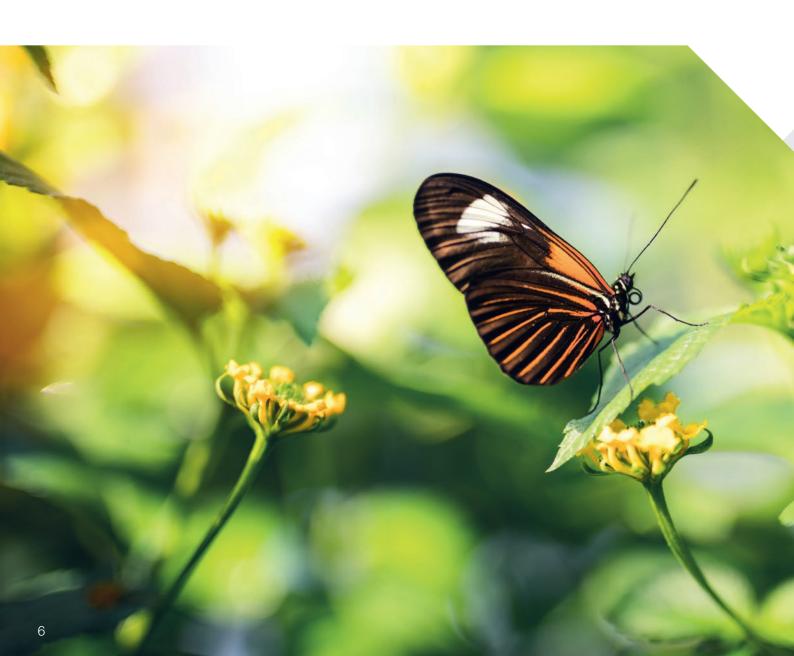



High brightness

Inspire and engage audiences by bringing subjects to life with the brightest, most colourful images. With equally high White and Colour Light Output, whatever the subject, you can count on that level of brightness for all content across the entire screen.



Higher contrast, amazing clarity

Project every detail even on the biggest screens with high contrast ratios up to 2,500,000:1. This means that the brightest white is 2,500,000 times brighter than the darkest black, bringing content to life.




High definition for total clarity

Reproduce every detail to add clarity to any scenario with resolutions up to 4KE. Create sharper text and detailed images that are easier on the eye and get your message across more effectively.



Agile collaborative spaces

Transform your workspace with large, scalable displays. Epson's easy-to-use display solutions are designed to enrich collaborative and agile working environments. They boost engagement and promote greater knowledge sharing with students, colleagues, clients and conference delegates using the latest and most versatile connectivity options.

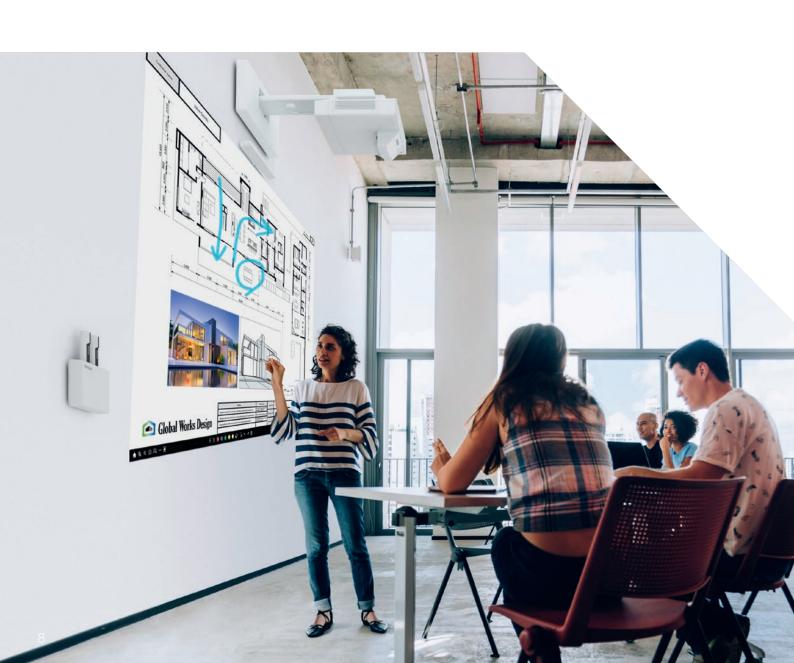

Flexible display options and sizes

Deliver impactful sessions with a choice of display options and sizes* at one fixed cost:

Up to 100" (16:10 standalone)

Up to 100" (16:9 standalone)

Up to 120" (16:6 standalone)

Up to 155" DuoLink interactivity (EB-1485Fi only), which combines two interactive displays using edge blending.

Collaborate and connect

Create agile working environments and share content quickly and simply with easy-to-use, intuitive on-screen interfaces and optional pen or finger touch on the interactive models.

Wirelessly connect any mobile device with Epson iProjection App or Screen Mirroring (Miracast) functionality*. Compatible with Windows, MacOS, iOS, Android and Chromebooks, iProjection is free to download and allows you to display content from multiple devices and platforms whilst retaining control over what is displayed and when.

Optimise meeting interactions

Combine up to four sources, such as video conference systems from multiple video sources and presentations, by creating a sliding split screen*.

Fit and forget laser technology*

Use for up to 30,000 hours (Eco mode) without any maintenance, with the additional peace of mind of a five-year warranty.

Interactive displays

Laser: EB-760Wi, EB-770Fi,

EB-780Fi, EB-1485Fi

Lamp: EB-685Wi, EB-695Wi

Non-interactive displays

Laser: EB-L210SW, EB-L210SF, EB-760W, EB-770F, EB-810E

Lamp: EB-685W

The above laser models are compatible with the ELPWP10





EB-1485Fi

Multiple display options and sizes up to 155" (with DuoLink interactivity)

5.000 lumens

Full HD (1366 x 768 x 2) resolution, 16:9 wide display

Touch and dual pen interactivity

Built-in digital whiteboard

Multiple connectivity options including HDMI out and HDBaseT

Built-in wireless and Screen Mirroring (Miracast)

Split-screen interactivity

Built-in slot for a mini PC

Five year warranty

^{*}Not available on all products, please check product specifications for details.

Versatile, scalable display solutions

Bring presentations for audiences of any size to life with our mainstream business displays. Versatile connectivity and installation options mean, whatever your budget, there is a display to suit your needs.

Bright, scalable and affordable

EB-992F

Full HD resolution - 1080p

Flexible installation or move between rooms

4,000 lumens brightness

Up to 300" scalable display

Built-in wireless and Screen Mirroring (Miracast)

Up to 17,000 hours lamp life (in Eco mode)

Other models in range EB-E20, EB-X49, EB-W49, EB-982W, EB-FH52



Portable, slim and lightweight for truly mobile presenting

EB-1795F

1.8kg

Full HD resolution - 1080p

3,200 lumens brightness

Up to 300" scalable display

Multi-projection functions

Built-in wireless and Screen Mirroring (Miracast)

Up to 7,000 hours lamp life (in Eco mode)

Other models in range EB-1780W





Compact displays with flexible connectivity either mounted or mobile

EB-2250U

Full HD resolution – WUXGA 5,000 lumens brightness Up to 300" scalable display Optional wireless Up to 10,000 hours lamp life (in Eco mode)



Smart fit and forget creative laser solutions

EB-L770U

4KE (WUXGA) resolution 7,000 lumens high brightness Up to 500" scalable display

Multi-projection functions

Optional wireless

Up to 30,000 hours light source life (in Eco mode)

Other models in the range EB-L260F, EB-L210W, EB-L520U, EB-L530U, EB-L570U, EB-L630U, EB-L630SU, EB-L635SU, EB-L720U, EB-L735U, EB-L770U, EB-L775U

Compatible with the ELPWP10 Wireless Presentation System (except for EB-L570U, EB-L770U, EB-L775U which use ELPWP20 WPS)









Create the right impression

Make your workplace more inviting to visitors and employees with Epson's lighting and signage solutions. Display up-to-the-minute information to reflect promotional and seasonal messaging.

Flexible mounting options mean projectors can be mounted out of sight and reach on ceilings, walls and lighting tracks for dynamic, impactful signage that doesn't clutter your environment. And, with a maintenance-free life of up to 30,000 hours, these laser light-source products are the ideal solution for displaying engaging messaging.



EB-800 Series

EB-800F, EB-805F



5,000lm with Full HD 1080p resolution
Ultra-short-throw with edge blending support
Scalable and affordable informative signage
display solution

Other models in the ultra short throw lighting and signage range are EB-770F, EB-775F

EV-110 Series

EV-110, EV-115



2,200lm brightness

Transform work spaces with experiential lighting and signage projection

Add information and entertainment to objects and surfaces, even glass

Other models in the lighting and signage range are EB-U50, EB-L260F, EB-L265F

Premium solutions for large audiences

Take your visual creativity to the next level with our breathtaking laser installation projectors.

Create superb projections with Epson's range of installation projectors in up to 30,000lm brightness. Transform larger spaces, auditoriums and even buildings with creative display and mapping solutions using Epson laser installation projectors.



EB-PU1000 Series

EB-PU1006W, EB-PU1007W, EB-PU1007B, EB-PU1008W, EB-PU1008B, EB-PU2010W, EB-PU2010B



Superb image quality

Enjoy the improved texture and exceptional sharpness, clarity and detail of laser projectors with 4K enhancement technology.

Flexibility

A wide choice of interchangeable lenses makes finding the perfect solution for a new or upgraded projection set-up easy. Even short projection distances can be achieved with the optional ultra-short-throw, zero-offset lenses. Motorised optics, advanced geometric correction and 360 degree projection facilitate fast and flexible installation, while portrait projection and edge-blending offer even wider scope for creating stunning, seamless displays in large environments.

Better connections

Integrate easily into almost any IT set-up with advanced connectivity features. Offering HDMI, HDBaseT and RJ45 support across the range, it is easy to connect and control your display. Advanced models in the range support SDI input and output.

High reliability

The inorganic phosphor wheel offers superior light- and heat-resistance and excellent reliability, resulting in a light source which is maintenance-free for up to 20,000 hours.

EB-PU2200 Series

EB-PU2113W, EB-PU2213B, EB-PU2116W, EB-PU2216B, EB-PU2120W, EB-PU2220B



EB-L30000U





Epson's wireless presentation systems make it easy for you to share your screen and increase your productivity.

Automatic start-up

Epson display solutions automatically turn on when the transmitter is plugged into a laptop.

Receiver functionality

The receiver functionality is integrated with Epson display solutions* reducing your initial costs (ELPWP10 only).


Intuitive design

It's simple enough that anyone can use it without special training. Multi-screen display and screen hiding are just as easy.

Smooth screen switching

Switching to the next presenter's screen is a breeze. No more interrupting meetings to fiddle with cables or moving to a seat where the cable can reach.

Achieve a wire free meeting room





ELPWP10

For Epson display solutions*



Transmitter x2







Tray for transmitters

Just plug the transmitter into your laptop

To connect, plug the transmitter into a USB port. No need to worry about wireless settings or cables. No special software to install, no prior preparation.



Click and share it's that easy

One click on the app's button and you are displaying on a big screen.



ELPWP20

For any HDMI display



Transmitter x2



Receiver (base unit)



Tray for transmitters

Share up to four screens on one screen

Enhance your productivity by comparing multiple documents on the big, easy-to-view screen.



ELPWT01

Additional transmitter



Bring content to life

Bring content into a new dimension by capturing and recording 3D objects and displaying them on the big screen. These compact high-resolution video cameras are easy to connect to your projector, whether you're at home or in the office.

Crisp detail

Capture and record pictures and objects in Full HD using the high-resolution 2-megapixel camera. The optical and digital zoom provides ultra-sharp detail and magnification. Rely on smooth video with no motion blur thanks to a high frame rate of 30 frames per second.

Large, real life image capture

Enjoy full flexibility from any angle by rotating the camera and amplifying content. Easily capture larger materials up to A3 in size – from full A4 textbook spreads to large 3D objects – without having to reposition them.





Easy operation, simple control

Access camera controls easily on-screen for hassle-free presenting without having to move between PC, projector and camera.



A versatile presenting partner

Recordings of images, clips, screen pictures and annotations from another device can be saved and viewed using the SD card slot and reader.



Microscope attachment included

Included as standard on ELPDC13 and ELPDC21.



Visualisers

ELPDC07, ELPDC13, ELPDC21 Supplied with carry case.









Create the perfect solution

Every environment and every presentation is different, so we offer a wide range of solutions to create your perfect projector package, including lamps, ceiling mounts, screens and lenses.



Epson genuine lamps

Guarantee the best, brightest and most consistent images for longer with genuine Epson lamps. They guarantee the best image quality, maximise reliability, minimise maintenance and ensure ongoing comprehensive warranty cover.



Ceiling mounts

Fit your projector perfectly to your venue and ensure flexibility, safety and security with tailor-made mounts.



2.4GHz wireless LAN adapter ELPAP10

2.4/5GHz wireless LAN adapter ELPAP11

Make fast, secure, wireless presentations or connect to your wireless infrastructure with this USB adapter.

Selected product compatibility.



Active speakers ELPSP02

Add powerful audio to any meeting space solution with compact speakers.



Control and connection box ELPCB03

Benefit from greater device connectivity, ease of use and neat cable management. This convenient, wall-mounted box boasts a direct source button for 3x HDMI connectivity and split screen support.



Wireless presentation system ELPWP10

Intuitive, low-cost wireless presentation system that improves collaboration by displaying content from up to four devices on a large display.

Expand possibilities

We have built innovative relationships with leading technology companies to enhance the presenting experience even further. From wireless presenting and remote conferencing to whiteboard software, digital content and device control, we make sure that every element adds value and has guaranteed compatibility. This ensures you have the most up-to-date systems, now and in the future.



Crestron

Crestron automation and control solutions allow you to control entire environments with the push of a button, integrating systems such as AV, lighting, shading, security, BMS and HVAC. Monitor, manage and control everything from one platform.



Extron

Extron designs advanced technologies that create impressive-looking images, high-quality sound, and systems that are easy to control and work reliably. Extron's asset management tools help technology professionals manage large numbers of audio/visual systems.



Smit Visual

Smit Visual is a leading Dutch manufacturer of visual supplies, such as whiteboards and projection boards.



Mozaik Education

Mozaik offers market leading interactive educational K-12 content (3D scenes, videos, apps, games, etc) for all subjects with built-in white-boarding functions, LMS, homework and classroom management features.




TeamMate

TeamMate is a leading manufacturer of contemporary and innovative audio/visual and collaborative furniture solutions for education, corporate and retail spaces.

Enhance your projector's capabilities

Inspiring presentations and innovative solutions go hand-in-hand. That's why we have developed a dynamic portfolio of advanced display tools. Epson solutions will optimise your business productivity and give you a platform to deliver your best work and ideas.

As the world's leading projector manufacturer¹, we enable you to present the way you want, where you want, easily and effectively. To discover just how much more flexible your current Epson display solution could be, visit www.epson.eu/epson-projector-software.

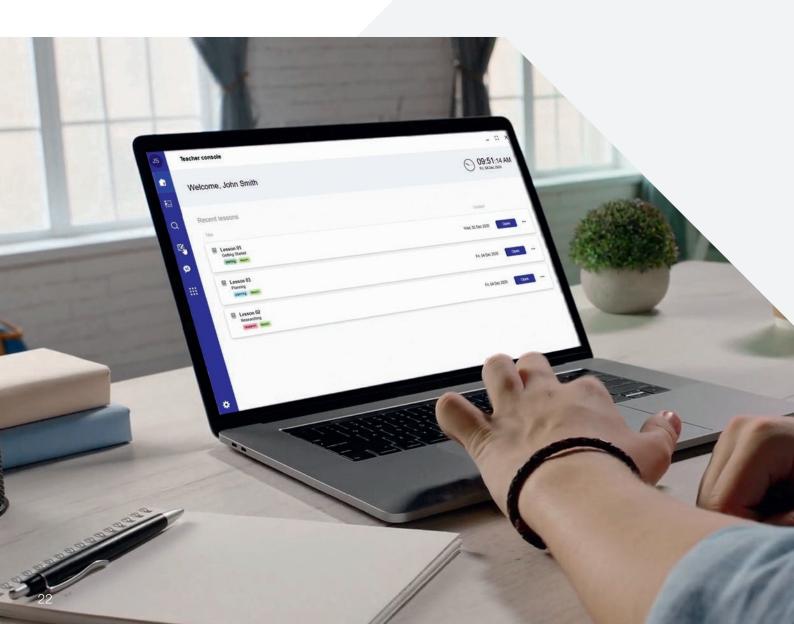

Stream, share and collaborate

Wirelessly stream and share

iProjection for PC / Mac

Wireless Screen Mirroring solution that utilises the built-in Wi-Fi connection of the presenter's device to stream and share content to the projector. Up to 50 devices can be connected to the same projector and up to four can present their content at the same time. The built-in moderator mode allows one user to take control of incoming content from the connected devices.

iProjection App for iOS / Android

Feature-rich BYOD solution for smartphones and tablets allows users to stream and share content, annotate and even control the projector, all directly from their devices. There is also a multi device mode for group collaboration. The built-in moderator mode allows one user to take control of incoming content from the connected devices.

iProjection App for Chromebooks

Supports fully mirrored display of all your Chromebook content including Google Docs, Slides, Sheets and Chrome browser.

Screen Mirroring (Miracast)

Industry-wide standard that enables Screen Mirroring from compatible smartphones, tablets and PCs to enhance BYOD flexibility and provide the freedom of wireless connectivity.

Interactivity and collaboration

GoBoard Education software

Our new solution offers an advanced whiteboard with built in online functionality, integration with many common VC applications and wireless connectivity with multiple device types.

www.epson.eu/goboard

Easy Interactive Tools

Gives you annotation and drawing capability on projected images or a whiteboard. You can also perform simple control of your document camera and projector.



Some software solutions may be restricted to selected models only. Please refer to product specifications.

Projector management solutions

Monitoring and control

Epson Projector Management

The free-to-download centralised management utility lets IT, facilities and network managers efficiently monitor, control and manage their display solution fleet. The software is also compatible with PJLink certified devices.

Functions include operation status, error reporting and input source switching. The scheduling feature can power down all the projectors in a building, while error monitoring helps avoid delays and downtime.

Epson Professional Projector Tool

Simplify multi-projector installations with intuitive geometry corrections such as edge-blending and adjustment for curved surfaces, plus colour-matching and brightness controls.

Epson Projector Configuration Tool

This free application for smart devices makes setting up and configuring multiple projectors easy. Simply register the projector's data using NFC connectivity, read and edit the settings in the app and then upload the settings to a fleet of projectors without even needing to power the projectors on.



Content management

Epson Projector Content Manager

Add images and videos to playlists, and save them on an external storage device (SD card or USB drive). Insert the storage device into the projector to easily project your playlist content without using a cable connection. Add custom shape filters, overlay effects and scheduling.

Epson Creative Projection

Create custom content on your smartphone or tablet, with ease. Enliven rooms and product displays by combining your photos and movies with the app's built-in templates and stamps.

Utilities

Display size calculator

Work out the ideal display size for your room based on room dimensions, layout and number of seats.

www.epson.eu/display-size-matters

Throw distance calculator

Easily work out image sizes and projection distance dimensions across our entire projector range. Simply select your desired screen size or the projection distance, and the smart online tool will automatically calculate all the necessary installation dimensions.

www.epson.eu/distancecalculator



Model	EB-1780W	EB-1795F	EB-FH52	EB-E20	EB-X49	EB-W49
		from the second of		-3.	(3 s	1990 E. X
Resolution	WXGA (1280 x 800)	Full HD (1920 x 1080)	Full HD (1920 x 1080)	XGA (1024 x 768)	XGA (1024 x 768)	WXGA (1280 x 800)
Native aspect	16:10	16:9	16:9	4:3	4:3	16:10
Colour Light Output (lumens) normal / eco	3,000 / 1,900	3,200 / 1,900	4,000 / 2,400	3,400 / 2,200	3,600 / 2,400	3,800 / 2,600
Contrast ratio	10,000:1	10,000:1	16,000:1	15,000:1	16,000:1	16,000:1
Lightsource	Lamp 4,000 / 7,000	Lamp	Lamp	Lamp	Lamp	Lamp
Lightsource life (hours) normal / eco Throw ratio in native	1.04 - 1.26:1	4,000 / 7,000 1.02 - 1.23:1	5,500 / 12,000 1.32 - 2.14:1	6,000 / 12,000 1.44 - 1.95:1	6,000 / 12,000 1.48 - 1.77:1	8,000 / 17,000 1.30 - 1.56:1
aspect Scalable image size	30 - 300"	30 - 300"	30 - 300"	30 - 350"	30 - 300"	33 - 320"
(diagonal)						
Zoom Vertical keystone Horizontal keystone	Optical x1.2 Automatic ±30° Manual ±30°	Optical x1.2 Automatic ±30° Automatic +20°	Optical x1.6 Automatic ±30° Manual ±30°	Digital x1.35 Manual ±30° Manual ±30°	Optical x1.2 Automatic ±30° Manual ±30°	Optical x1.2 Automatic ±30° Manual ±30°
Lens shift	N/A	N/A	N/A	N/A	N/A	N/A
Speaker output	1W	1W	16W	5W	5W	5W
Connectivity	VGA in, Composite RCA, USB Type B, USB Type A, HDMI	VGA in, Composite RCA, USB Type B, USB Type A, HDMI, Screen Mirroring (Miracast)	VGA in, HDMI in x2, Composite in, USB 2.0 Type A, USB 2.0 Type B, Wireless LAN, Screen Mirroring (Miracast)	VGA in x2, VGA out, HDMI in, Composite in, USB 2.0 Type B, RS-232C	VGA in x2, VGA out, HDMI in, Composite in, USB 2.0 Type A, USB 2.0 Type B, RS-232C, RJ45, Wireless LAN (optional)	VGA in x2, VGA out, HDMI in x2, Composite in, USB 2.0 Type A, USB 2.0 Type B, RS-232C, RJ45, Wireless LAN (optional)
Audio connectivity	Stereo mini in	Stereo mini in	RCA pair in	Stereo mini out, Stereo mini in (2x), RCA pair in	Stereo mini out, Stereo mini in (2x), RCA pair in	Stereo mini out, Stereo mini in (2x), RCA pair in
Networking	Wireless LAN	Wireless LAN	Wireless LAN unit	N/A	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit
Epson software solutions	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	N/A	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management
Other features	3-in-1 USB display, AV mute slide, DICOM SIM colour mode, Split screen, PC-free presentation, Kensington lock, Wireless LAN security, Password protection, Carry case	3-in-1 USB display, AV mute slide, DICOM SIM colour mode, Split screen, PC-free presentation, Auto screen fit and Auto focus, Real time keystone correction, Gesture Presenter, NFC, Kensington lock, Wireless LAN security, Password protection, Carry case	AV mute slide, Horizontal keystone slider, Quick corner correction, Split screen, Auto source search, QR code function, Kensington lock, Padlock, Security cable hole, Stream and share features, Password protection, Carry case	AV mute slide, Horizontal keystone slider, Quick corner correction, Split screen, Auto source search, Kensington lock, Padlock, Security cable hole, Password protection, Optional carry case	A/V mute slide, Horizontal keystone slider, Quick corner correction, Split screen, Auto source search, QR code function, Kensington lock, Padlock, Security cable hole, Password protection, Optional carry case	AV mute slide, Horizontal keystone slider, Quick corner correction, Split screen, Auto source search, QR code function, Kensington lock, Padlock, Security cable hole, Password protection, Optional carry case
Noise (dB) normal / eco	39/30	39 / 30	37 / 28	37 / 28	37 / 28	37 / 28
Weight (kg)	1.8	1.8	3.1	2.7	2.7	2.7
Dimensions exc. feet (W x D x H mm)	292 x 213 x 44	292 x 213 x 44	309 x 282 x 90	302 x 249 x 87	302 x 249 x 87	302 x 249 x 87
Power consumption normal / eco	277W / 200W	295W / 208W	327W / 225W	327W / 225W	327W / 225W	327W / 225W
Power consumption	0.34W	0.34W	0.3W	0.3W	0.3W	0.3W
standby, comm. off TCO Certified	 Yes	Yes	No	No	No	No
Standard interchangeable lens included	N/A	N/A	N/A	N/A	N/A	N/A
Warranty	Projector - 5 years Lamp - 5 years / 1,000hrs	Projector - 5 years Lamp - 5 years / 1,000hrs	Projector - 3 years Lamp - 3 years / 1,000hrs	Projector - 3 years Lamp - 3 years / 1,000hrs	Projector - 3 years Lamp - 3 years / 1,000hrs	Projector - 3 years Lamp - 3 years / 1,000hrs

EB-982W	EB-992F	EB-L210SW	EB-L210SF	EB-685W	EB-760W	EB-770F
	700 Z x		900	3 no III		
WXGA (1280 x 800)	Full HD (1920 x 1080)	WXGA (1280 x 800)	Full HD (1920 x 1080)	WXGA (1280 x 800)	WXGA (1280 x 800)	Full HD (1920 x 1080)
16:10 4,200 / 2,600	16:9 4,000 / 2,400	16:10 4,000 / 2,800	16:9 4,000 / 2,800	16:10 3,500 / 2,900	16:10 4,100 / 2,800	16:9 4,100 / 2,800
16,000:1 Lamp	16,000:1 Lamp	2,500,000:1 Laser	2,500,000:1 Laser	14,000:1 Lamp	2,500,000:1 Laser	2,500,000:1 Laser
6,500 / 17,000	6,500 / 17,000	20,000 / 30,000 / N/A	20,000 / 30,000 / N/A	5,000 / 10,000 / 9,000	20,000 / 30,000 / N/A	20,000 / 30,000 / N/A
1.38 - 2.24:1	1.32 - 2.14:1	0.48 - 0.65:1	0.45 - 0.61:1	0.28:1	0.27 - 0.37:1	0.25 - 0.35:1
29 - 280"	30 - 300"	53 - 120"	55 - 125''	60 - 100"	60" - 150"	60" - 150"
Optical x1.6 Automatic ±30° Manual ±30°	Optical x1.6 Automatic ±30° Manual ±30°	Digital x1.35 Manual ±15° Manual ±15°	Digital x1.35 Manual ±15° Manual ±15°	Digital x1.35 Manual ±3° Manual ±3°	Digital x1.35 Manual ±3° Manual ±3°	Digital x1.35 Manual ±3° Manual ±3°
N/A 16W	N/A 16W	N/A 16W	N/A 16W	N/A 16W	N/A 16W	N/A 16W
VGA in x2, VGA out, HDMI in x2, Composite in, USB 2.0 Type A, USB 2.0 Type B, RS-232C, RJ45, Wireless LAN (optional)	VGA in x2, VGA out, HDMI in x2, Composite	VGA in x2, VGA out, HDMI x2, USB Type A (5v/2A), USB Type B,	VGA in x2, VGA out, HDM x2, USB Type A (5v/2A), USB Type B, Composite RCA, RS-232C, Screen Mirroring (Miracast), Wireless LAN	VGA in, VGA out (switchable), HDMI x3, Composite RCA, S-Video, USB Type A x2, USB Type B, MHL (via HDMI 1), RS-232C	VGA in x2, VGA out, HDM x3, Composite, USB Type A x2 (5v/2A x1), USB Type B, RS-232C, Screen Mirroring (Miracast), Wireless LAN	VGA in x2, VGA out, HDMI x3, Composite, USB Type A x2 (5v/2A x1), USB Type B, RS-232C, Screen Mirroring (Miracast), Wireless LAN
Stereo mini out, Stereo mini in (2x), RCA pair in, Microphone input	Stereo mini out, Stereo mini in (2x), RCA pair in, Microphone input	Stereo mini in x2, Microphone stereo mini in, Stereo mini out, RCA pair in	Stereo mini in x2, Microphone stereo mini in, Stereo mini out, RCA pair in	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out
LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and Wireless LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and wireless LAN unit
Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management
AV mute slide, Horizontal keystone slider, Quick corner correction, Split screen, Auto source search, QR code function, Kensington lock, Padlock, Security cable hole, Password protection, Optional carry case	A/V mute slide, Horizontal keystone slider, Quick corner correction, Split screen, Auto source search, QR code function, Kensington lock, Padlock, Security cable hole, Stream and share features, Password protection, Optional carry case	Stream and share features, AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection, optional carry case, Optional wall mount or ceiling mount	Stream and share features, 21:9 display, AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection, optional carry case, Optional wall mount or ceiling mount	Home screen, Multi- screen interactivity, Auto source search, AV mute, Split screen up to 2 sources, 3-in-1 USB display, Copy OSD settings, Auto lamp dimming, PC-free presentation, Padlock, Security cable hole, Kensington lock	Optional mount, Stream and share features, Screen sharing function (client), AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Split screen up to 4 sources, Auto source search, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection	Optional mount, edge- blending, 16:6 display, 21:9 display, Stream and share features, Screen sharing function (client), AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Split screen up to 4 sources, Auto source search, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection
37 / 28	37 / 28	37 / 27 / N/A	37 / 27 / N/A	35 / 30 / 29	37 / 27 / N/A	37 / 27 / N/A
3.1 309 x 282 x 90	3.1 309 x 282 x 90	4.6 325 x 337 x 90	4.6 325 x 337 x 90	5.7 367 x 400 x 149	5.9 356 x 395 x 133	5.9 356 x 395 x 133
327W / 225W	327W / 225W	260W / 191W / N/A	260W / 191W / N/A	354W / 309W / 309W	263W / 199W / N/A	263W / 199W / N/A
0.3W	0.3W	0.5W	0.5W	0.37W	0.5W	0.5W
No	No	N/A	N/A	Yes	N/A	N/A
N/A	N/A	N/A	N/A	N/A	N/A	N/A
Projector - 5 years Lamp - 5 years / 1,000hrs	Projector - 5 years Lamp - 5 years / 1,000hrs	5 years / 12,000hrs	5 years / 12,000hrs	Projector - 5 years Lamp - 5 years / 1,000hrs	5 years / 12,000hrs	5 years / 12,000hrs

Model	EB-810E	EB-685Wi	EB-695Wi	EB-760WI	EB-770FI
		2 = 111	5 TH		
Resolution Native aspect	4KE (1080p) 16:9	WXGA (1280 x 800) 16:10	WXGA (1280 x 800) 16:10	WXGA (1280 x 800) 16:10	Full HD (1920 x 1080) 16:9
Colour Light Output	5,000 / 3,500	3,500 / 2,900	3,500 / 2,900	4,100 / 2,800	4,100 / 2,800
(lumens) normal / eco	2,500,000:1	14,000:1	14,000:1	2,500,000:1	2,500,000:1
Lightsource	Laser	Lamp	Lamp	Laser	Laser
Lightsource life (hours) normal / eco / eco2	20,000 / 30,000 / N/A	5,000 / 10,000 / 9,000	5,000 / 10,000 / 9,000	20,000 / 30,000 / N/A	20,000 / 30,000 / N/A
	0.16:1	0.28:1	0.28:1	0.25 - 0.35:1	0.25 - 0.35:1
Scalable image size (diagonal)	80" - 150" wall mount 80" to 160" table mount	60 - 100"	60 - 100"	65 - 100"	65 - 100" 16:9 aspect 60 - 110" 16:6 aspect
Zoom		Digital x1.35	Digital x1.35	Digital x1.35	Digital x1.35
Vertical keystone Horizontal keystone	N/A N/A	Manual ±3° Manual ±3°	Manual ±3° Manual ±3°	Manual ±3° Manual ±3°	Manual ±3° Manual ±3°
Lens shift	N/A	N/A	N/A	N/A	N/A
Speaker output	2 x 8W	16W	16W	16W	16W
Connectivity	HDMI In x2, out x1 (HDCP2.3), HDBaseT 1 (HDCP2.3), RS-232C, USB Type-A x2 (1x for data and ELPAP11, 1x for data and 2A power), USB Type B x1, RJ45, Screen Mirroring (Miracast), Wireless LAN	VGA in x2, VGA out (switchable), HDMI x3, Composite RCA, S-Video, USB Type A, USB Type B, MHL (via HDMI 1), RS-232C, Sync in, Sync out	VGA in x2, VGA out (switchable), HDMI x3, Composite RCA, S-Video, USB Type A, USB Type B, MHL (via HDMI 1), RS-232C, Sync in, Sync out	VGA in x2, VGA out, HDMI x3, Composite, USB Type A x2, USB Type A x2 (5v/2A x1), RS-232C, Sync in, Sync out, Touch unit control, Screen Mirroring (Miracast), Wireless LAN	VGA in x2, VGA out, HDMI x3, Composite, USB Type A x2, USB Type A x2 (5v/2A x1), RS-232C, Sync in, Sync out, Touch unit control, Screen Mirroring (Miracast), Wireless LAN
Audio connectivity	N/A	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out
Networking	LAN (RJ45) and wireless LAN	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and wireless LAN unit
Epson software solutions	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management, Epson Projector Content Manager (Windows/macOS), Epson Creative Projection (iOS), Epson Setting Assistant	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, various collaboration software tools, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, various collaboration software tools, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, various collaboration software tools, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, various collaboration software tools, Epson Projector Management
Other features	Optional wall and ceiling mounts, 21:9 optional output, Improved audio chamber for impoved bass and overall sound quality. Automated ccreen distortion correction via app. and share features, Screen sharing function (client), AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Split screen up to 2 sources, Auto source search, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection	Home screen, Multi-screen interactivity, Auto source search, AV mute, Split screen, 3-in-1 USB display, Copy OSD settings, Auto lamp dimming, Pen and touch interactivity, Auto calibration, PC-free presentation, Padlock, Security cable hole, Kensington lock	Home screen, Multi-screen interactivity, Auto source search, AV mute, Split screen, 3-in-1 USB display, Copy OSD settings, Auto lamp dimming, Pen and touch interactivity, Auto calibration, PC-free presentation, Padlock, Security cable hole, Kensington lock	Pen interactivity and optional touch, Optional mount, Interactive home screen, Stream and share features, Screen sharing function (client), Whiteboard mode with document export support, Sliding split screen, split screen up to 4 sources, AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Auto source search, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection	Pen interactivity and optional touch, Optional mount, edge-blending, 16:6 display, 21:9 display, Interactive home screen, Stream and share features, Screen sharing function (client), Whiteboard mode with document export support, Sliding split screen, split screen up to 4 sources, AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Auto source search, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection
Noise (dB) normal / eco / eco2	38 / 27 / N/A	35 / 30 / 29	35 / 30 / 29	37 / 27 / N/A	37 / 27 / N/A
Weight (kg)	12.2	5.8	5.8	6.0	6.0
Dimensions exc. feet (W x D x H mm)	695 x 341 x 145	367 x 400 x 149	367 x 400 x 149	356 x 395 x 133	356 x 395 x 133
Power consumption normal / eco / eco2	440W / N/A	354W / 309W / 309W	354W / 309W / 309W	263W / 199W / N/A	263W / 199W / N/A
Power consumption standby, comm. off	0.5W	0.37W	0.37W	0.5W	0.5W
TCO Certified	N/A	Yes	Yes	N/A	N/A
Standard interchangeable lens included	N/A	N/A	N/A	N/A	N/A
Warranty	5 years / 12,000hrs	Projector - 5 years Lamp - 5 years / 1,000hrs	Projector - 5 years Lamp - 5 years / 1,000hrs	5 years / 12,000hrs	5 years / 12,000hrs

EB-780Fi SMART	EB-1485Fi	EB-2250U	EB-L210W	EB-L260F	EB-L520U
		- 34	9		The same of the sa
Full HD (1920 x 1080) 16:9	Full HD (1366 x 768 x 2) 16:9	WUXGA (1920 x 1200) 16:10	WXGA (1280 x 800) 16:10	Full HD (1920 x 1080) 16:9 (supports 16:6 and 21:9)	WUXGA (1920 x 1200) 16:10
4,100 / 2,800	5,000 / 3,500	5,000 / 3,800	4,500 / 3,100	4,600 / 3,200	5,200 / 3,640
2,500,000:1	2,500,000:1	15,000:1	2,500,000:1	2,500,000:1	Over 2,500,000:1
Laser 20.000 / 30.000 / N/A	Laser 20.000 / 30.000 / N/A	Lamp 5,000 / 10,000 / N/A	Laser 20.000 / 30.000	Laser 20,000 / 30,000	Laser 20,000 / 30,000 / N/A
0.25 - 0.35:1	0.27 - 0.37:1	1.38 - 2.28:1	1.41 - 2.26:1	1.32 - 2.12	1.35 - 2.20:1
65 - 100" 16:9 aspect 60 - 110" 16:6 aspect	65 - 100" 16:9 aspect 61 - 120" 16:6 aspect	50 - 300"	30 - 300"	31-310"	50 - 500"
Digital x1.35	Digital x1.35	Optical x1.6	Optical x1.62	Optical x1.62	Optical x1.6
Manual ±3° Manual ±3°	Manual ±3° Manual ±3	Automatic ±30° Automatic ±20°	Automatic ±30° Automatic ±30°	Automatic ±30° Automatic ±30°	Manual ±30° Manual ±30°
N/A 16W	N/A 2 x 8W	N/A 16W	N/A 16W	N/A 16W	N/A 10W
VGA out, HDMI x3, Composite, USB Type A x2 (5w/2A x1), USB Type B x2, RS-232C, Sync in, Sync out, Touch unit control, Screen Mirroring (Miracast), Wireless LAN	VGA in, VGA out, HDMI x3, USB Type A x2, USB Type B, HDMI-out, RS-232C, Sync in, Sync	VGA in x2, VGA out, HDMI x2, Composite RCA, USB Type A, USB Type B, RS-232C, MHL (via HDMI 1)	VGA in (2x), VGA out, Composite in, HDMI in x2, USB Type A (2A), USB	VGA in (2x), VGA out, Composite in, HDMI in x2, USB Type A (2A), USB Type B, RS-232C, RJ45, Wireless LAN, Screen Mirroring (Miracast)	VGA in x2, VGA out, HDMI in x2, HDBaseT, Miracast (when use ELPAP11),
Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini out, Stereo mini in (2x), RCA pair in	Stereo mini out, Stereo mini in (2x), RCA pair in, Microphone input	Stereo mini out, Stereo mini in (2x), RCA pair in, Microphone input	Stereo mini out, Stereo mini in (2x)
LAN (RJ45) and wireless LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit
access to online and cloud- based content and systems direct from the interactive display - with no PC needed. Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, various collaboration	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, various collaboration software tools, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson Projector Management, Epson iProjection (Win/Mac/ Chrome/iOS/Android), USB Display (Win/Mac), Epson Wireless Transmitter Settings (Win/Mac)	Epson Projector Management, Epson iProjection (Win/Mac/ Chrome/iOS/Android), USB Display (Win/Mac), Epson Projector Content Manager (Win/Mac), Epson Creative Projection (iOS), Epson Wireless Transmitter Settings (Win/Mac)	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management, Epson Projector Content Manager
software tools, Epson Projector Management. Pen interactivity and optional touch, Optional mount, edge-blending, 16:6 display, 21:9 display, Interactive home screen, Stream and share features, Screen sharing function (client), Whiteboard mode with document export support, Sliding split screen, split screen up to 4 sources, AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Auto source search, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection	Constant brightness mode, 16:6 display, Interactive home screen, Stream and share features, DuoLink interactivity, Screen sharing function (server/client), Whiteboard mode with document export support, Multiple display via Daisy chain, Auto power on, Auto source search, AV mute, Sliding split screen, split screen up to 4 sources, Copy OSD settings, Pen and touch interactivity, Auto calibration, DICOM SIM colour mode, HDBaseT external control pad, Set-up wizard	Home Screen, Gesture Presenter, AV mute, screen fit, Split screen, Auto power on, DICOM colour mode, DCDi by Faroudja, Schedule function, Focus help, Real time keystone correction, Quick corner, PC-free presentation, 3-in-1 USB display, Padlock, Security bar, Kensington lock	AVV mute slide, Horizontal keystone slider, Quick corner correction, PC-free, Split screen - up to 4 sources, Auto source search, QR code function, Kensington lock, Pacllock, Security cable hole, Wireless LAN security, Password protection, VESA mount - easy previous mount replacement, Optional carry case	mute slide, Horizontal keystone slider, Quick corner correction, PC-free, Split screen - up to 4 sources,	Edge blending, PC Free, Quick corner, Screen share, Source function, Ultra-wide display (16:6), Home Screen, AV mute, Split screen - up to 4 sources, Auto power on, Auto source search, Quick startup, Padlock, Security cable hole, Kensington lock, 360° installation, Wireless LAN unit lock
37 / 27 / N/A	36 / 27 / N/A	39 / 29 / N/A	37 / 27 / N/A	37 / 27 / N/A	31 / 23 / N/A
6.0 359 x 395 x 133	9.5 458 x 209.5 x 375	4.6 377 x 291.5 x 110	4.5 325 x 299 x 90	4.2 325 x 299 x 90	7.7 440 x 304 x 122
263W / 199W / N/A	366W / 262W / N/A	405W / 323W / N/A	260W / 191W	260W / 191W	293W / 233W / N/A
0.5W	0.5W	0.31W	0.5W	0.5W	0.3W
N/A	Yes	No	N/A	N/A	Yes
N/A	N/A	N/A	N/A	N/A	N/A
5 years / 12,000hrs	5 years / 12,000hrs	Projector - 5 years Lamp - 5 years / 1,000hrs	5 years / 12,000hrs	5 years / 12,000hrs	3 years

Model	EB-L720U	EB-L530U	EB-L630U	EB-L730U	EB-L735U	EB-L630SU
	(E) ====	(Page)		tion.	(B)	- 11113 PROF
Resolution	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)
Native aspect Colour Light Output	16:10 7,000 / 4,900	16:10 5,200 / 3,640	16:10 6,200 / 4,340	16:10 7,000 / 4,900	16:10 7,000 / 4,900	16:10 6,000 / 4,200
(lumens) normal / eco	Over 2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1
Lightsource	Laser	Laser	Laser	Laser	Laser	Laser
(hours) normal / eco	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000
Throw ratio in native aspect	1.35 - 2.20:1	1.35 - 2.20:1	1.35 - 2.20:1	1.35 - 2.20:1	1.35 - 2.20:1	0.8:1
Scalable image size (diagonal)	50 - 500"	50 - 500"	50 - 500"	50 - 500"	50 - 500"	50 - 200"
Zoom Vertical keystone	Optical x1.6 Manual ±30°	Optical x1.6 Manual ±30°	Optical x1.6 Manual ±30°	Optical x1.6 Manual ±30°	Optical x1.6 Manual ±30°	Digital x1.35 Manual ±30°
Horizontal keystone	Manual ±30°	Manual ±30°	Manual ±30°	Manual ±30°	Manual ±30°	Manual ±30°
Lens shift	N/A	± 50% Vertical ± 20% Horizontal	± 50% Vertical ± 20% Horizontal	± 50% Vertical ± 20% Horizontal	± 50% Vertical ± 20% Horizontal	± 50% Vertical ± 20% Horizontal
Speaker output	10W	10W	10W	10W	10W	10W
Connectivity	VGA in x2, VGA out, HDMI in x2, HDBaseT, Miracast (when use ELPAP11), USB Type A, USB Type B, RS-232C, Ethernet, Wireless LAN a/n (5GHz) (optional)	HDMI in x2, HDMI out, HDBaseT, VGA in x2, VGA out, RS-232C, USB Type A x2, USB Type B, Screen Mirroring (Miracast)	HDMI in x2, HDMI out, HDBaseT, VGA in x2, VGA out, RS-232C, USB Type A x2, USB Type B, Screen Mirroring (Miracast)	HDMI in x2, HDMI out, HDBaseT, VGA in x2, VGA out, RS-232C, USB Type A x2, USB Type B, Screen Mirroring (Miracast)	HDMI in x2, HDMI out, HDBaseT, VGA in x2, VGA out, RS-232C, USB Type A x2, USB Type B, Screen Mirroring (Miracast)	HDMI in x2, HDMI out, HDBaseT, VGA in x2, VGA out, RS-232C, USB Type A x2, USB Type B, Screen Mirroring (Miracast)
Audio connectivity	Stereo mini in x2, Stereo mini out	Stereo mini in x2, Stereo mini out	Stereo mini in x2, Stereo mini out	Stereo mini in x2, Stereo mini out	Stereo mini in x2, Stereo mini out	Stereo mini in x2, Stereo mini out
Networking	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45), built-in wireless and optional wireless LAN unit
Epson software solutions	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management, Epson Projector Content Manager	Management, Epson Projector Content	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection
Other features	AV mute, Arc correction, Edge blending, PC Free, Quick corner, Screen share, Source function, Ultra-wide display (16:6), Home Screen, AV mute, Split screen - up to 4 sources, Auto power on, Auto source search, Quick startup, Padlock, Security cable hole, Kensington lock, 360° installation, Wireless LAN unit lock	playback for source-free signage, Edge blending, Daisy chain multiprojection, Point and Arc correction, Schedule function, Split screen, Auto source search, Copy OSD settings, Padlock, Security cable hole, Kensington lock, 360° installation, Cable	AV mute, USB content playback for source-free signage, Edge blending, Daisy chain multi-projection, Point and Arc correction, Schedule function, Split screen, Auto source search, Copy OSD settings, Padlock, Security cable hole, Kensington lock, 360° installation, Cable cover included	AV mute, USB content playback for source-free signage, Edge blending, Daisy chain multi-projection, Point and Arc correction, Schedule function, Split screen, Auto source search, Copy OSD settings, Padlock, Security cable hole, Kensington lock, 360° installation, Cable cover included	AV mute, USB content playback for source-free signage, Edge blending, Daisy chain multi-projection, Point and Arc correction, Schedule function, Split screen, Auto source search, Copy OSD settings, Padlock, Security cable hole, Kensington lock, 360° installation, Cable cover included	AV mute, USB content playback for source-free signage, Edge blending, Daisy chain multiprojection, Point and Arc correction, Schedule function, Split screen, Auto source search, Copy OSD settings, Padlock, Security cable hole, Kensington lock, 360° installation, Cable cover included
Noise (dB) normal / eco	39 / 27	31 / 23	38 / 27	38 / 27	38 / 27	38 / 27
Weight (kg)	7.8	8.2	8.4	8.4	8.4	8.4
Dimensions exc. feet (W x D x H mm)	440 x 304 x 122	440 x 304 x 122	440 x 304 x 122	440 x 304 x 122	440 x 304 x 122	440 x 304 x 122
Power consumption normal / eco	345W / 258W	293W / 223W	345W / 258W	345W / 258W	345W / 258W	345W / 258W
	0.3W	0.3W	0.3W	0.3W	0.3W	0.3W
TCO Certified	Yes	Yes	Yes	Yes	Yes	No
Standard interchangeable lens included	N/A	N/A	N/A	N/A	N/A	N/A
Warranty	3 years	3 years	3 years	3 years	3 years	3 years

EB-L635SU	EB-L570U	EB-L770U	EB-L775U	EB-PU1006W	EB-PU1007W	EB-PU1007B
	-11017	William William				
WUXGA (1920 x 1200) 16:10 6,000 / 4,200	4KE (WUXGA) 16:10 5,200 / 3,640	4KE (WUXGA) 16:10 7,000 / 4,900	4KE (WUXGA) 16:10 7,000 / 4,900	WUXGA (1920 x 1200) 16:10 6,000 / 4,200	WUXGA (1920 x 1200) 16:10 7,000 / 4,900	WUXGA (1920 x 1200) 16:10 7,000 / 4,900
2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000
0.8:1	1.35 - 2.20:1	1.35 - 2.20:1	1.35 - 2.20:1	1.44 - 2.32:1	1.44 - 2.32:1	1.44 - 2.32:1
50 - 200"	50 - 500"	50 - 500"	50 - 500"	50 - 1,000"	50 - 1,000"	50 - 1,000"
Digital x1.35 Manual ±30° Manual ±30° ± 50% Vertical ± 20% Horizontal 10W HDMI in x2, HDMI out,	Optical x1.6 Manual ±30° Manual ±30° ± 50% Vertical ± 20% Horizontal 10W HDMI in x2. HDMI out.	Optical x1.6 Manual ±30° Manual ±30° ± 50% Vertical ± 20% Horizontal 10W HDMI in x2, HDMI out,	Optical x1.6 Manual ±30° Manual ±30° ± 50% Vertical ± 20% Horizontal 10W HDMI in x2, HDMI out,	Optical x1.6 Manual ±45° Manual ±30° ± 67% Vertical ± 30% Horizontal N/A HDMI in (HDCP 2.3),	Optical x1.6 Manual ±45° Manual ±30° ± 67% Vertical ± 30% Horizontal N/A HDMI in (HDCP 2.3).	Optical x1.6 Manual ±45° Manual ±30° ± 67% Vertical ± 30% Horizontal N/A HDMI in (HDCP 2.3),
HDBaseT, VGA in x2, VGA out, RS-232C, USB Type A x2, USB Type B, Screen Mirroring (Miracast)	HDBaseT, RS-232C, USB Type A (2A), USB Type B, Optional wireless	HDBaseT, RS-232C, USB Type A (2A), USB Type B, Optional wireless (ELPAP11)	HDBaseT, RS-232C, USB Type A (2A), USB	DVI in, HDBaseT, VGA in, RS-232C, USB	DVI in, HDBaseT, VGA in, RS-232C, USB Type A, USB Type B (Service only), Remote, NFC	DVI in, HDBaseT, VGA in, RS-232C, USB Type A, USB Type B (Service only), Remote, NFC
Stereo mini in x2, Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out
LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45), optional wireless LAN unit	LAN (RJ45), optional wireless LAN unit	LAN (RJ45), optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit
Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson Projector Management (Win), Epson iProjection (Win/ Mac/iOS/Android/ Chrome), Epson Projector Professional Tool (Win/ Mac), Epson Projector Content Manager (Win/ Mac), Epson Creative Projection (iOS)	Epson Projector Management (Win), Epson iProjection (Win/ Mac/iOS/Android/ Chrome), Epson Projector Professional Tool (Win/ Mac), Epson Projector Content Manager (Win/ Mac), Epson Creative Projection (iOS)	Epson Projector Management (Win), Epson iProjection (Win/ Mac/iOS/Android/ Chrome), Epson Projector Professional Tool (Win/ Mac), Epson Projector Content Manager (Win/ Mac), Epson Creative Projection (iOS)	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool
AV mute, USB content playback for source-free signage, Edge blending, Daisy chain multiprojection, Point and Arcorrection, Schedule function, Split screen, Auto source search, Copy OSD settings, Padlock, Security cable hole, Kensington lock, 360° installation, Cable cover included		AV mute, Edge blending, Point correction, Quick Corner, Curved surface correction, Corner wall, Geometry correction memory, Schedule setting, Split screen, Source search, Padlock & Security Cable Hole, Kensington Lock, Wireless LAN Unit Lock, PC Free (Still image/ Movie), Copy OSD settings, Projector Control and Management, 360° installation, Cable cover included, Optional camera for simple tiling and stacking	A/V mute, Edge blending, Point correction, Quick Corner, Curved surface correction, Corner wall, Geometry correction memory, Schedule setting, Split screen, Source search, Padlock & Security Cable Hole, Kensington Lock, Wireless LAN Unit Lock, PC Free (Still image/ Movie), Copy OSD settings, Projector Control and Management, 360° installation, Cable cover included, Optional camera for simple tiling and stacking	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, Cable cover included	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens,	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, Cable cover included
38 / 27	31 / 23	38 / 27	38 / 27	30 / 28	33 / 29	33 / 29
8.4 440 x 304 x 122	8.3 440 x 304 x 122	8.5 440 x 304 x 122	8.5 440 x 304 x 122	15.4 545 x 436 x 164	16.3 545 x 436 x 164	16.3 545 x 436 x 164
345W / 258W	312W / 234W	366W / 268W	366W / 268W	367W / 310W	431W / 366W	431W / 366W
0.3W	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W
No	N/A	N/A	N/A	No	No	No
N/A	N/A	N/A	N/A	N/A	N/A	N/A
3 years	3 years	3 years	3 years	3 years	3 years	3 years

Model	EB-PU1008W	EB-PU1008B	EB-PU2010W	EB-PU2010B	EB-PU2113W	EB-PU2213B	EB-PU2116W
		THE PART OF THE PA				70	
Resolution Native aspect Colour Light Output (lumens) normal / eco	WUXGA (1920 x 1200) 16:10 8,500 / 5,950	WUXGA (1920 x 1200) 16:10 8,500 / 5,950	WUXGA (1920 x 1200) 16:10 10,000 / 7,000	WUXGA (1920 x 1200) 16:10 10,000 / 7,000	WUXGA (1920 x 1200) 16:10 13,000 / 9,100	WUXGA (1920 x 1200) 16:10 13,000 / 9,100	WUXGA (1920 x 1200) 16:10 16,000 / 11,200
Contrast ratio Lightsource Lightsource life (hours) normal / eco	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000
Throw ratio in native aspect	1.44 - 2.32:1	1.44 - 2.32:1	1.57 - 2.56:1	1.57 - 2.56:1	1.57 - 2.56:1	1.57 - 2.56:1	1.57 - 2.56:1
Scalable image size (diagonal)	50 - 1,000"	50 - 1,000"	60 - 1,000"	60 - 1,000"	60 - 1,000"	60 - 1,000"	60 - 1,000"
Zoom Vertical keystone Horizontal keystone	Manual ±30°	Optical x1.6 Manual ±45° Manual ±30°	Optical x1.6 Manual ±45° Manual ±30°	Optical x1.6 Manual ±45° Manual ±30°	Optical 1.6x Manual ±45° Manual ±30°	Optical 1.6x Manual ±45° Manual ±30°	Optical 1.6x Manual ±45° Manual ±30°
Lens shift Speaker output	± 67% Vertical ± 30% Horizontal N/A	± 67% Vertical ± 30% Horizontal N/A	± 60% Vertical ± 18% Horizontal N/A	± 60% Vertical ± 18% Horizontal N/A	± 60% Vertical ± 18% Horizontal N/A	± 60% Vertical ± 18% Horizontal N/A	± 60% Vertical ± 18% Horizontal N/A
Connectivity	HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS-232C, USB Type A, USB	HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS-232C, USB Type A, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBase T, SDI in, SDI out, VGA in, RS-232C, USB Type A, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBaseT, SDI in, SDI out, VGA in, RS-232C, USB Type A, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS-232C, USB Type A x2, USB Type B (Service only), Remote, NFC	HDMI in (HDCP 2.3), DVI in, HDBaseT, SDI in, SDI out, VGA in, RS-232C, USB	HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS-232C, USB Type A x2, USB Type B (Service only), Remote, NFC
Audio connectivity	Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out	Stereo mini out
Networking	·	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit
Epson software solutions	for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content	for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	and Chromebook, Epson Projector Professional Tool, Epson Projector	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool
Other features	Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, Cable cover included	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Daisy chain multi- projection, Portrait projection, Portrait projection, AV mute, USB content playback for source- free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, Cable cover included	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Daisy chain multi- projection, Portrait projection, AVV mute, USB content playback for source- free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, Cable cover included	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, IP5X certified¹	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Daisy chain multi-projection, Mechanical shutter, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, IP5X certified¹	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 360° installation, IP5X certified¹
Noise (dB) normal / eco	35 / 30	35 / 30	37 / 30	37 / 30	34 / 29	34 / 29	38 / 34
Weight (kg) Dimensions exc. feet (W x D x H mm)	16.3 545 x 436 x 164	16.3 545 x 436 x 164	16.8 545 x 436 x 164	16.8 545 x 436 x 164	23.8 586 x 492 x 185	23.7 586 x 492 x 185	24.3 586 x 492 x 185
Power consumption normal / eco	535W / 452W	535W / 452W	535W / 452W	535W / 452W	864W / 633W	864W / 633W	1083W / 773W
Power consumption standby, comm. off	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W
TCO Certified Standard	No N/A	No N/A	No N/A	No N/A	No N/A	No N/A	No N/A
interchangeable lens included	IV/A	IV/A	IWA	IV/A	IN/A	IV/A	IV/A
Warranty	3 years	3 years	3 years	3 years	3 years	3 years	3 years

EB-PU2216B	EB-PU2120W	EB-PU2220B	EB-L30000U	EB-U50	EV-110	EV-115
PP (1)		TO (1)		- O		3
	WUXGA (1920 x 1200) 16:10 20,000 / 14,000	WUXGA (1920 x 1200) 16:10 20,000 / 14,000	WUXGA (1920 x 1200) 16:10 30,000 / 21,000	WUXGA (1920 x 1200) 16:10 3,700 / 2,400	WXGA (1280 x 800) 16:10 2,200 / 1,100	WXGA (1280 x 800) 16:10 2,200 / 1,100
Laser	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000	16,000:1 Lamp 10,000 / 17,000	2,500,000:1 Laser 20,000 / 30,000	2,500,000:1 Laser 20,000 / 30,000
1.57 - 2.56:1	1.57 - 2.56:1	1.57 - 2.56:1	1.74 - 2.35:1	1.38 - 1.68:1	1.38 - 2.19:1	1.38 - 2.19:1
60 - 1,000"	60 - 1,000"	60 - 1,000"	100 - 1,000"	30 - 300"	30 - 150"	30 - 150"
Manual ±45° Manual ±30° ± 60% Vertical ± 18% Horizontal N/A HDMI in (HDCP 2.3), DVI in, HDBaseT, SDI in, SDI out, VGA in, RS-232C, USB	Optical 1.6x Manual ±45° Manual ±30° ± 60% Vertical ± 18% Horizontal N/A HDMI in (HDCP 2.3), DVI in, HDBaseT, VGA in, RS-232C, USB Type A x2, USB Type B (Service only),	Optical 1.6x Manual ±45° Manual ±30° ± 60% Vertical ± 18% Horizontal N/A HDMI in (HDCP 2.3), DVI in, HDBaseT, SDI in, SDI out, VGA in, RS-232C, USB Type A x2, USB Type	Optical x1.4 Manual ±45° Manual ±30° ± 65% Vertical ± 30% Horizontal N/A VGA in, VGA out, DVI in, BNC in, HDBaseT, HD-SDI, HDMI (HDCP 2.2)	Optical x1.2 Automatic ±30° Manual ±30° N/A 5W VGA in, VGA out, HDMI x 2, USB Type A (for 1,200mA power supply), USB Type B (for firmware updates),	Optical x1.6 Manual ±45° Manual ±40° N/A N/A SD card, HDMI in, USB Type A (for GPI function or 5V/2A power supply), USB Type B (for firmware	Optical x1.6 Manual ±45° Manual ±40° N/A N/A SD card, HDMI in, USB Type A (for GPI function or 5V/2A power supply), USB Type B (for firmware
B (Service only), Remote, NFC	Remote, NFC	B (Service only), Remote, NFC		RS-232C	updates)	updates)
LAN (RJ45) and optional wireless	Stereo mini out LAN (RJ45) and optional wireless LAN unit	Stereo mini out LAN (RJ45) and optional wireless LAN unit	N/A LAN (RJ45) and optional wireless LAN unit	Stereo mini in x2, Stereo mini out LAN (RJ45) and wireless LAN	Stereo mini out, Bluetooth LAN (RJ45) and wireless LAN	Stereo mini out, Bluetooth LAN (RJ45) and wireless LAN
Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Professional Tool, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection, Epson Projector Config Tool	Epson Projector Management, Epson iProjection (Windows/Mac), Epson iProjection App for iOS and Android, Epson Projector Professional Tool	for iOS and Android, Epson Projector Management, Epson Projector Content	Epson iProjection (Windows/Mac), Epson iProjection App for iOS and Android, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection	Epson iProjection (Windows/Mac), Epson iProjection App for iOS and Android, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection
HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Daisy chain multi-projection, Mechanical shutter, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved	4K enhancement, HDR support, Powered zoom, Focus and lens shift, Lens memory, Interchangeable lens options including zero offset UST lens, Optional camera, Portrait projection, AV mute, USB content playback for source-free signage, Edge blending, Point correction, Curved surface and corner wall correction, 1P5X certified¹	shift, Lens memory,		free signage, Optional lighting track mount and ceiling mount/ floor stand	Constant brightness mode, Home screen, Schedule function, Auto source search, AV mute, SD card playback for source free signage, Optional lighting track mount and floor stand, Edge blending, 360° installation, Built-in media player, GPI function	Constant brightness mode, Home screen, Schedule function, Auto source search, AV mute, SD card playback for source free signage, Optional lighting track mount and floor stand, Edge blending, 360° installation, Built-in media player, GPI function
38 / 34	45 / 37	45 / 37	49 / 41	37 / 28	34 / 22	34 / 22
586 x 492 x 185	24.4 586 x 492 x 185	24.4 586 x 492 x 185	63.8 790 x 710 x 299	3.1 364 x 248 x 95	5.0 Projection unit 175 x 260 x 175 Power supply 361 x 110 x 65	5.0 Projection unit 175 x 260 x 175 Power supply 361 x 110 x 65
	1301W / 899W	1301W / 899W	2,325W / 1,511W	285W / 218W	149W / 122W	149W / 122W
	0.5W	0.5W	0.5W	0.3W	0.4W	0.4W
	No N/A	No N/A	No N/A	No N/A	No N/A	No N/A
3 years	3 years	3 years	5 years / 20,000hrs carry-in	Projector - 3 years Lamp - 1 year / 1,000hrs	5 years / 12,000hrs	5 years / 12,000hrs

Model	EB-L260F	EB-L265F	EB-770F	EB-775F	EB-800F	EB-805F
			P00	(F90)		
Resolution Native aspect	(Full HD (1920 x 1080) 16:9	Full HD (1920 x 1080) 16:9	Full HD (1920 x 1080)) 16:9	Full HD (1366 x 768 x 2) 16:9	Full HD (1366 x 768 x 2) 16:9
Colour Light Output (lumens) normal / eco	21:9) 4,600 / 3,200	4,600 / 3,200	4,100 / 2,800	4,100 / 2,800	5,000 / 3,500	5,000 / 3,500
Contrast ratio	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1
Lightsource life	Laser 20,000 / 30,000	Laser 20,000 / 30,000	Laser 20,000 / 30,000 / N/A	Laser 20,000 / 30,000	Laser 20,000 / 30,000	Laser 20,000 / 30,000
(hours) normal / eco Throw ratio in native	1.32 - 2.12	1.32 - 2.12	0.25 - 0.35:1	0.25 - 0.35:1	0.27 - 0.37:1	0.27 - 0.37:1
aspect Scalable image size (diagonal)	31 - 310"	31 - 310"	60 - 150"	60 - 150"	65 - 130" 16:9 aspect 61 - 120" 16:6 aspect	65 - 130" 16:9 aspect 61 - 120" 16:6 aspect
Zoom	Optical x1.62	Optical x1.62	Digital x1.35	Digital x1.35	Digital x1.35	Digital x1.35
Vertical keystone Horizontal keystone	Automatic ±30° Automatic ±30°	Manual ±30° Manual ±30°	Manual ±3° Manual ±3°	Manual ±3° Manual ±3°"	Manual ±3° Manual ±3°	Manual ±3° Manual ±3°
Lens shift	N/A	N/A	N/A	N/A	N/A	N/A
Speaker output Connectivity	16W VGA in (2x), VGA out, Composite in, HDMI in x2, USB Type A (2A), USB Type B, RS-232C, RJ45, Wireless LAN, Screen Mirroring (Miracast)	16W VGA in, VGA out, HDMI x2, Composite, USB Type A x1, USB Type B, RS-232C, Screen Mirroring (Miracast), Wireless LAN	16W VGA in x2, VGA out, HDMI x3, Composite, USB Type A x2 (5v/2A x1), USB Type B, RS-232C, Screen Mirroring (Miracast), Wireless LAN	16W VGA in x2, VGA out, HDMI x3, Composite, USB Type A x2 (5v/2A x1), USB Type B, RS-232C, Screen Mirroring (Miracast), Wireless LAN	2x 8W VGA in x2, VGA out, HDMI in x3, HDMI out, Composite in, HDBaseT, RS-232, USB Type A x2, USB Type B	2x 8W VGA in x2, VGA out, HDMI in x3, HDMI out, Composite in, HDBaseT, RS-232, USB Type A x2, USB Type B
Audio connectivity	Stereo mini out, Stereo mini in (2x), RCA pair in, Microphone input	Stereo mini in x2, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x3, Microphone stereo mini in, Stereo mini out	Stereo mini in x2, Stereo mini out	Stereo mini in x2, Stereo mini out
Networking	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45), built-in wireless and optional wireless LAN unit	LAN (RJ45) and wireless LAN unit	LAN (RJ45) and wireless LAN unit"	LAN (RJ45) and optional wireless LAN unit	LAN (RJ45) and optional wireless LAN unit
Epson software solutions	Epson Projector Management, Epson iProjection (Win/Mac/ Chrome/iOS/Android), USB Display (Win/ Mac), Epson Projector Content Manager (Win/ Mac), Epson Creative Projection (iOS), Epson Wireless Transmitter Settings (Win/Mac)	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection for iOS	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management	Epson iProjection (Windows/Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management, Epson Content Manager, Epson Creative Projection for iOS		Epson iProjection (Windows/ Mac), Epson iProjection App for iOS, Android and Chromebook, Epson Projector Management, Epson Projector Content Manager, Epson Creative Projection
Other features	Edge-blending, 16:6 display, 21:9 display, PC-free, AV mute slide, Horizontal keystone slider, Quick corner correction, PC-free, Split screen - up to 4 sources, Auto source search, QR code function, Kensington lock, Padlock, Security cable hole, Wireless LAN security, Signage functions (content model, spotlight & content playback), Password protection, DICOM SIM, includes cable cover, VESA mount - easy previous mount replacement, Optional carry case,	Optional mount, edge-blending, 16:6 display, Stream and share features, Screen sharing function (client), AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Split screen up to 4 sources, Auto source search, Padlock, Security cable hole, Kensington lock, Password protection, Content playback, Floor & ceiling installation, tighting track installation	Optional mount, edgeblending, 16:6 display, 21:9 display, Stream and share features, Screen sharing function (client), AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Split screen up to 4 sources, Auto source search, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection, Edge blending, Content playback, Ceiling install	Optional mount, edge- blending, 16:6 display, 21:9 display, Stream and share features, Screen sharing function (client), AV mute, Copy OSD settings, Quick corner correction, PC-free presentation, Split screen up to 4 sources, Auto source search, Padlock, Security cable hole, Kensington lock, Wireless LAN unit lock, Password protection, Edge blending, Content playback, Ceiling install	16:6 display, Multi-projection via daisy chain, AVV mute, USB content playback for source-free signage, Edge blending, Point and Arc correction, Schedule function, Auto source search, Copy OSD settings, DICOM colour mode, Padlock, Security cable hole, Kensington lock, 360° installation, Optional wall mount	16:6 display, Multi-projection via daisy chain, AV mute, USB content playback for source-free signage, Edge blending, Point and Arc correction, Schedule function, Auto source search, Copy OSD settings, DICOM colour mode, Padlock, Security cable hole, Kensington lock, 360° installation, Optional wall mount
Noise (dB) normal / eco	37 / 27 / N/A	37 / 27 / N/A	37 / 27 / N/A	37 / 27 / N/A	36 / 27	36 / 27
Weight (kg)	4.2	4.2	5.9	5.9	9.2	9.2
Dimensions exc. feet (W × D × H mm)	325 x 299 x 90	325 x 299 x 90	356 x 395 x 133	356 x 395 x 133	458 x 210 x 375	458 x 210 x 375
Power consumption normal / eco	260W / 191W	260W / 191W	263W / 199W / N/A	263W / 199W / N/A	366W / 262W	366W / 262W
Power consumption standby, comm. off	0.5W	0.5W	0.5W	0.5W	0.5W	0.5W
TCO Certified	N/A	N/A	N/A	N/A	Yes	Yes
Standard interchangeable lens included	N/A	N/A	N/A	N/A	N/A	N/A
Warranty	5 years / 12,000hrs	5 years / 12,000hrs	5 years / 12,000hrs	5 years / 12,000hrs	5 years / 12,000hrs	5 years / 12,000hrs

Model	ELPWP10	ELPWP20
Compatible displays	EB-L210W, EB-L210SW, EB-L210SF, EB-L260F, EB-L265F, EB-L520U, EB-L530U, EB-L630U, EB-L630SU, EB-L635SU, EB-L720U, EB-L730U, EB-L735U, EB-760W, EB-760Wi, EB-770F, EB-770Fi, EB-775F and EB-1485Fi	All HDMI displays
Receiver		
Inputs	2x HDMI (HDCP2.3, CEC), Miracast R2, Miracast (display	2x HDMI (HDCP2.3, CEC), Miracast R2, Miracast, USB-A,
Compatible with Epson Document	dependent), USB-A, Mini-USB-B (for service use), iProjection Yes	Mini-USB-B (for service use), iProjection Yes
Cameras		
Connect via network infrastructure	Display dependent	Yes (RJ45)
Frame rate (max)	18 fps	18 fps
Number of sources simultaneously displayed	1 to 4	1 to 4
Max. number of sources simultaneously connected (including transmitters)	6	6
Number of transmitters included	2	2
Screen sharing (Miracast R2)	Yes - Display dependent	Yes
Auto power on display	Yes (CEC)	Yes (CEC)
Video output	HDMI (HDCP2.3, CEC, 1080p)	HDMI (HDCP2.3, CEC, 1080p)
Audio output	Stereo mini	Stereo mini
Noise level	Fanless	Fanless
Transmitter cradle included	Yes (capacity: 6)	Yes (capacity: 6)
Warranty Transmitters	3 years	3 years
Max. supported resolution	W/ IVCA (1020v1200)	\\(\\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\
Compatible operating systems	WUXGA (1920x1200) Windows 8.1 or higher, MacOS 10.13-11.0	WUXGA (1920x1200) Windows 8.1 or higher, MacOS 10.13-11.0
Source device ports	USB-A, USB-C	USB-A, USB-C
Epson Wireless Presentation app (Windows and Mac)	Built into the transmitters	Built into the transmitters
Connection type - transmitter	Peer to peer WiFi	Peer to peer WiFi
Maximum range	10m	10m
Wireless transmission protocols	WiFi 5 (802.11a/b/g/n/ac)	WiFi 5 (802.11a/b/g/n/ac)
User selectable WiFi channel	Yes	Yes
User selectable transmitter bandwidth options	High quality (25Mbps), Standard quality (15Mbps), Low quality (7Mbps)	High quality (25Mbps), Standard quality (15Mbps), Low quality (7Mbps)
Pairing methods	Via PC using Configuration Tool or connecting transmitter to receiver for approx 3 seconds	Via PC using Configuration Tool or connecting transmitter to receiver for approx 3 seconds
Easy to disinfect the transmitters	Yes	Yes
Warranty	3 years	3 years
Authentication	Simple AP: WPA2-Personal	Simple AP: WPA2-Personal
	Infrastructure: WPA2/WPA3-Personal, WPA2/WPA3-Enterprise	Infrastructure: WPA2/WPA3-Personal, WPA2/WPA3-Enterprise
Transmission encryption Transmitter application requirements -	RSA AES-128-bit with new public key each session No (app runs directly from transmitter)	RSA AES-128-bit with new public key each session No (app runs directly from transmitter)
Installation	No.	NI.
Transmitter application requirements - Administrator privileges	No	No
Transmitter security iProjection	Transmitter storage is read only	Transmitter storage is read only
Connection type	Either via infrastructure network or simple connection (direct WiFi)	Either via infrastructure network or simple connection (direct WiFi)
Source device (iProjection) operating systems	Windows, MacOS, iOS, Android, Chromebook	Windows, MacOS, iOS, Android, Chromebook
Moderator function compatible	Yes	Yes
Software		
iProjection	Download from Epson website (Windows / Mac) or the relevant app store (iOS, Android and Chomebook)	Download from Epson website (Windows / Mac) or the relevant app store (iOS, Android and Chomebook)
Epson Wireless Presentation app (Windows and Mac)	Built into the transmitters	Built into the transmitters
Options	ELDIATON MALL TO THE	ELEMENT ME L. T.
Additional transmitters	ELPWT01 - Wireless Transmitter	ELPWT01 - Wireless Transmitter
What's in the box	Wireless Transmitter (ELDW/T01) v2 Wireless Transmitter transmitter	Wireless Transmitter (ELDWT01) v2 Wireless Transmitter transmitter
	Wireless Transmitter (ELPWT01) x2, Wireless Transmitter tray, Wireless LAN unit (ELPAP11), user guide, safety and support guide, quick start guide, regulatory compliance information	Wireless Transmitter (ELPWT01) x2, Wireless Transmitter tray, HDMI cable (1.8m), user guide, safety and support guide, quick start guide, regulatory compliance information, wireless receiver (ELPBU01), AC power adapter for Wireless Receiver, power cable for Wireless Receiver, remote control for Wireless Receiver, batteries for remote control, AC power adapter holder, wall mount unit for Wireless Receiver









- 1 2001 to 2020, 500-lumen and above, excluding screenless TVs, Futuresource Consulting Quarterly Projector Market Insights Worldwide Analyzer CY20Q4.
- 2 Networking not available on all products, please check product specifications for details.
- 3 Colour brightness (colour light output) in brightest mode, measured by a third-party lab in accordance with IDMS 15.4. Colour brightness will vary depending on usage conditions. Top-selling Epson 3LCD projectors versus top-selling 1-chip DLP projectors based on NPD sales data for October 2019 through September 2020.
- 4 Epson achieved certification by TCO Certified for selected families of projectors. TCO Certified is the world's most comprehensive sustainability certification for IT products, which must meet life cycle criteria for social and environmental sustainability. For more information, please visit https://tcocertified.com

For further information please contact your local Epson office or visit www.epson.eu/contact-us

For further information please contact your local Epson office or visit www.epson.eu/contact-us

Algeria +213 770 938 617 Austria 01 253 49 78 333 Belgium +32 (0)2 792 04 47 Czech +420 246 037 281 Denmark 44 50 85 85 East Africa (+254) 734 354 075

Finland 0201 552 091 France 09 74 75 04 04 (Cost of local call, operator charges may apply) Germany +49 (0) 2159/92 79 500 Greece (0030) 211 198 62 12

Hungary 06800 147 83 Ireland 01 436 7742 Israel (+972)-3-5751833 Italy 02-660321 10 (0,12 e/min) Luxembourg -352 27860892 Middle East +9714 2677638

Morocco +212 520 134 040 Netherlands +31 (0)20 708 5099 Norway +47 67 11 37 00 Poland +48 22 295 37 25 (0,16 2½min) Portugal 707 222 111

Romania 0040 214025024 Russia (095) 777-03-55 Slovakia +421 232 786 682 Southern Africa +27 (0) 10 109 5320 Spain 93 582 15 00 Sweden +46 8 5051 3701

(Mobilsamtal – 0,99 kr/min, Lokala samtal – 0,30 kr/min, Utlandssamtal – 0,89 kr/min) Switzerland 022 592 7923 Tunisia +216 9811 5564 Turkey (0212) 3360303

United Kingdom 0871 42 37766 (+10p per minute plus network extras) West Africa (+234)8020727843