


UMinIII Pro


Mini, the New Max

 30000:1 Ultra High Contrast

 3D-LUT Color Gamut Calibration Technology

 Human Eye Protection Design

 Cool Screen Technology



 Energy Saving Design



FEATURES

- Impressive viewing experience and dazzling color with 30000:1 super high contrast, 3D-LUT color gamut calibration technology
- Extremely comfortable experience enhanced by eye protection, cold screen and user-level safety design
- Energy-saving technology in use & standby
- Convenient operation and maintenance

APPLICATIONS

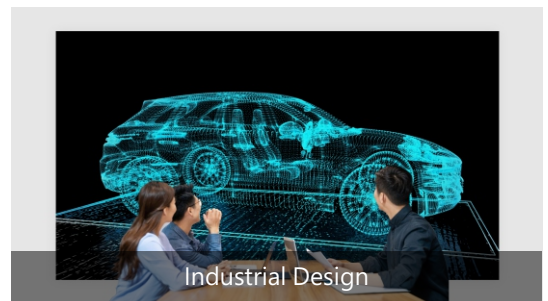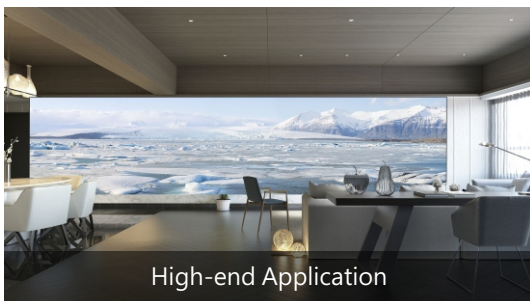

SPECIFICATIONS

Parameter	Value					
	UMiniIII Pro					
	UMiniIII Pro		UMiniIII			
Model	0.9	1.2	0.9	1.1	1.2	1.5
Pixel Pitch	0.93mm	1.25mm	0.93mm	1.17mm	1.25mm	1.56mm
LED Type	Fully flip chip COB	Fully flip chip COB	Fully flip chip COB	Fully flip chip COB	Fully flip chip COB	Fully flip chip COB
Pixel Density	113,778pixels /m ²	640,000 pixels/m ²	113,778pixels /m ²	728,178 pixels/m ²	640,000 pixels/m ²	409,600 pixels/m ²
Panel Resolution	640	480	640	512	480	384
	360	270	360	288	270	216
Panel Size (W × H × D)	600	600	600	600	600	600
	337.5	337.5	337.5	337.5	337.5	337.5
	40	40	40	40	40	40
	40	40	40	40	40	40
Brightness	600-1200cd/m ²	600-1200cd/m ²	600-1200cd/m ²	600-1200cd/m ²	600-1200cd/m ²	600-1200cd/m ²
Viewing Angle (H/V)	0~180°	0~180°	0~180°	0~180°	0~180°	0~180°
Service Access	Cabinet: Front Module: Front /Rear	Cabinet: Front Module: Front /Rear	Cabinet: Front Module: Front /Rear	Cabinet: Front Module: Front /Rear	Cabinet: Front Module: Front /Rear	Cabinet: Front Module: Front /Rear
Ingress Protection	Rear IP50	Rear IP50	Rear IP50	Rear IP50	Rear IP50	Rear IP50
Input Voltage	AC 100 ~ 240V	AC 100 ~ 240V	AC 100 ~ 240V	AC 100 ~ 240V	AC 100 ~ 240V	AC 100 ~ 240V
Operating Temperature/ Humidity	-10°C~+45°C/10~80% RH	-10°C~+45°C/10~80% RH	-10°C~+45°C/10~80% RH	-10°C~+45°C/10~80% RH	-10°C~+45°C/10~80% RH	-10°C~+45°C/10~80% RH
Storage Temperature/ Humidity	-20°C~+55°C/10~85% RH	-20°C~+55°C/10~85% RH	-20°C~+55°C/10~85% RH	-20°C~+55°C/10~85% RH	-20°C~+55°C/10~85% RH	-20°C~+55°C/10~85% RH

DIMENSIONS

