

UslimII

— SERIES —

Ease of Creation with Standard Product —Visualization Reinvented in Commercial Spaces



Ultra High-definition



Intelligent Operation & Maintenance



Creative Shapes



Ultra Slim & Light



Front & Rear Serviceable



Standardized Cabinet

APPLICATIONS




Shopping Mall



Retail



Showroom

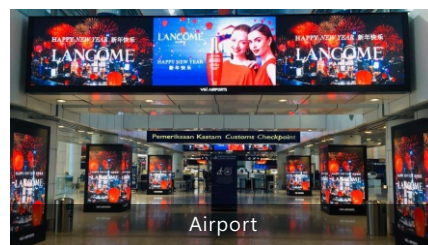

Airport

FEATURES

- Impressive viewing experience
- Intelligent operation & maintenance control
- Various creative shapes
- User-friendly design



SPECIFICATIONS

Parameter	Value				
Model	UslimII 1.5	UslimII 1.8	UslimII 2.5	UslimII 3.2	UslimII 3.9
Pixel Pitch	1.56mm	1.85mm	2.5mm	3.2mm	3.9mm
Pixel Density	409,600 dots/m ²	291,600 dots/m ²	160,000 dots/m ²	97,344 dots/m ²	65,536 dots/m ²
Panel Resolution	320 x 160 dots	270 x 135 dots	200 x 100 dots	156 x 78 dots	128 x 64 dots
	320 x 320 dots	270 x 270 dots	200 x 200 dots	156 x 156 dots	128 x 128 dots
	320 x 640 dots	270 x 540 dots	200 x 400 dots	156 x 312 dots	128 x 256 dots
Panel Size (W × H × D)	500mm×250mm×39.6mm	500mm×250mm×39.6mm	500mm×250mm×39.6mm	500mm×250mm×39.6mm	500mm×250mm×39.6mm
	500mm×500mm×39.6mm	500mm×500mm×39.6mm	500mm×500mm×39.6mm	500mm×500mm×39.6mm	500mm×500mm×39.6mm
	500mm×1000mm×39.6mm	500mm×1000mm×39.6mm	500mm×1000mm×39.6mm	500mm×1000mm×39.6mm	500mm×1000mm×39.6mm
Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Brightness	1,000 cd/m ²	1,000 cd/m ²	1,000 cd/m ²	1,000 cd/m ²	1,000 cd/m ²
Color Temperature	2,000 - 9,300 K Adjustable	2,000 - 9,300 K Adjustable	2,000 - 9,300 K Adjustable	2,000 - 9,300 K Adjustable	2,000 - 9,300 K Adjustable
Viewing Angle (H/V)	155°/155°	155°/155°	155°/155°	155°/155°	155°/155°
Panel Weight	3.2/5.6/10.5kg	3.2/5.6/10.5kg	3.2/5.6/10.5kg	3.2/5.6/10.5kg	3.2/5.6/10.5kg
Contrast Ratio	5,000 : 1	5,000 : 1	5,000 : 1	5,000 : 1	5,000 : 1
Service Access	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear
Input Power (Max.)	538 W/m ²	500 W/m ²	440 W/m ²	498 W/m ²	450 W/m ²
Input Power (Ave.)	179 W/m ²	167 W/m ²	147 W/m ²	166 W/m ²	150 W/m ²
Ingress Protection	IP30/IP10	IP30/IP10	IP30/IP10	IP30/IP10	IP30/IP10
Input Voltage	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC
Refresh Rate	3,840 Hz	3,840 Hz	3,840 Hz	3,840 Hz	3,840 Hz
Operating Temperature /Humidity	-10°C to 45°C/ 10% - 80% RH	-10°C to 45°C/ 10% - 80% RH	-10°C to 45°C/ 10% - 80% RH	-10°C to 45°C/ 10% - 80% RH	-10°C to 45°C/ 10% - 80% RH
Storage Temperature /Humidity	-20°C to 55°C/ 10% - 85% RH	-20°C to 55°C/ 10% - 85% RH	-20°C to 55°C/ 10% - 85% RH	-20°C to 55°C/ 10% - 85% RH	-20°C to 55°C/ 10% - 85% RH

DIMENSIONS

