

XS Series

Create for Imagination



Compatible Splicing Solution



Cabinet Curve Range Adjustment



Creative Shapes



ABS Technology



Ultra HD Display Effect





FEATURES

- Compatible splicing solution to meet a variety of creative modeling needs
- Various creative shapes enhanced by 9 angle adjustment gears for a single cabinet with $\pm 40^\circ$ curve range
- Impressive viewing experience with $\geq 95\%$ DCI-P3 color gamut content restoration*

*optional function

APPLICATIONS

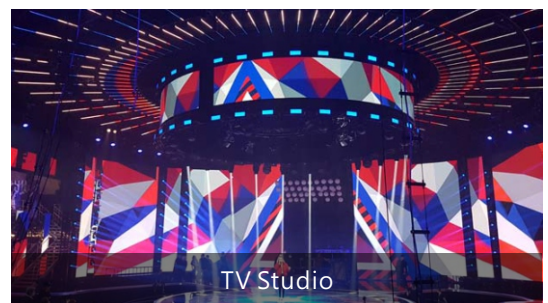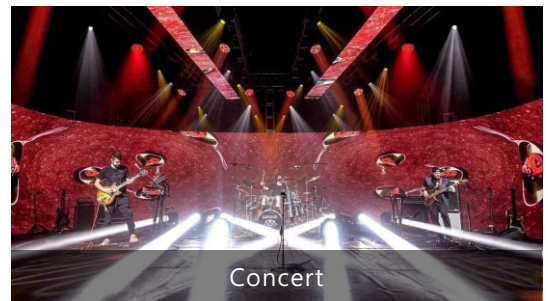

SPECIFICATIONS

Parameter	Value	
Model	XS2.6	XS3
Pixel Pitch	2.6mm	3.9mm
Pixel Density	147,456 pixels/m ²	65,536 pixels/m ²
Panel Resolution	192×192	128×128
Panel Size (W×H×D)	500 mm x 500 mm x 80 mm	500 mm x 500 mm x 80 mm
Material	Die-cast Aluminum	Die-cast Aluminum
Brightness	800-1200	800-1000
Color Temperature	2,000~9,300 adjustable	2,000~9,300 adjustable
Viewing Angle (H/V)	140/120	140/120
Panel Weight	7.7	7.7
Contrast Ratio	≥3000:1	≥3000:1
Service Access	Rear	Rear
Input Power/Panel (Max.)	150	150
Input Power/Panel (Ave.)	45	45
Ingress Protection	IP30	IP30
Input Voltage	100-240	100-240
Refresh Rate	3840	3840
Operating Temperature/Humidity	-20~+50/10~80%	-20~+50/10~80%
Storage Temperature/Humidity	-10~+45/10~80%	-10~+45/10~80%

DIMENSIONS

